
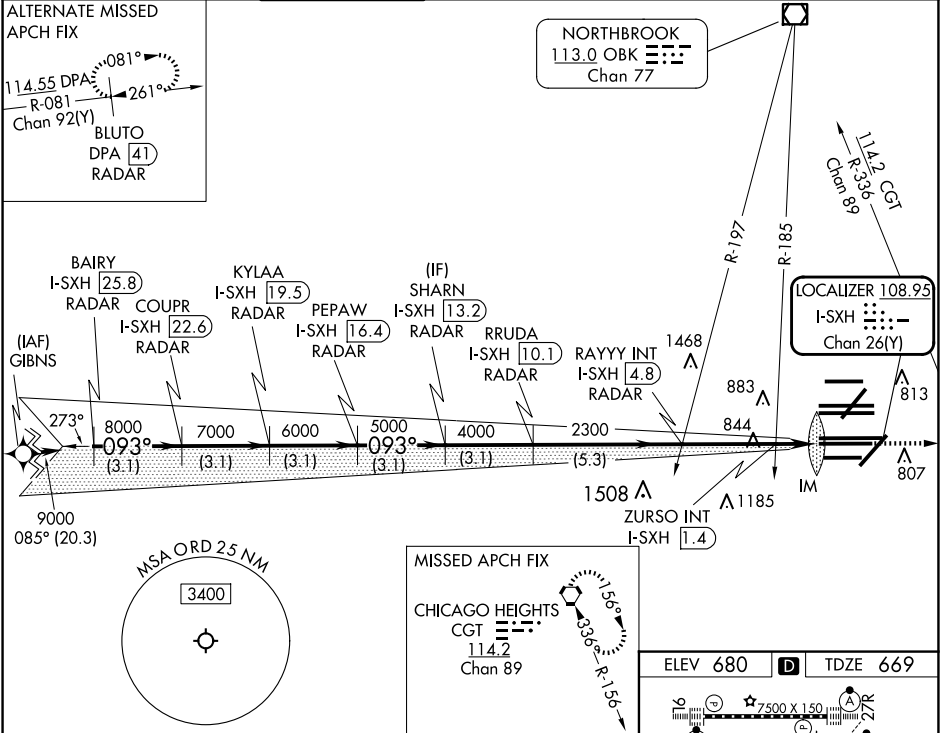


| | | |
|---------------|-------------|---------------------|
| LOC/DME I-SXH | APP CRS | Rwy Ldg |
| 108.95 | 093° | 10540 |
| Chan 26(Y) | | TDZE 669 |
| | | Apt Elev 680 |

ILS or LOC RWY 10C

CHICAGO O'HARE INTL (ORD)

| | | | | | | | |
|--|-------------------------------------|------------------------------|--|--|---|-------------------|-------|
| From GIBNS: RNAV-1 GPS required. | | | <div>ALSF-2</div> <div></div> | | MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold. | | |
| RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required. | | | | | | | |
| ▼ Simultaneous approach authorized. | | | | | | | |
| D-ATIS 135.4 282.225 | CHICAGO APP CON 119.0 292.125 | O'HARE TOWER 120.75 348.0 | GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs) | | (TWR CENTER) 121.75 (OBND) 121.9 (IBND) | CLNC DEL 121.6 | CPDLC |



| | | | | | | | | | | | | | | | | | |
|--------------------------------|--|---|--|---|--|--------------------------------|--|-----------------------------------|--|--------------------------------|--|--------------------------------|--|-----------------------------------|--|--|--|
| BAIRY I-SXH [25.8] RADAR | | COUPR I-SXH [22.6] RADAR | | VGSi and ILS glidepath not coincident KYLAA I-SXH [19.5] RADAR (VGSi Angle 3.00/TCH 75) | | SHARN I-SXH [13.2] RADAR | | RAYYY INT I-SXH [4.8] RADAR | | PEPAW I-SXH [16.4] RADAR | | RRUDA I-SXH [10.1] RADAR | | ZURSO INT I-SXH [1.4] RADAR | | I-SXH DME ANTENNA I-SXH [0.2] IM | |
| 9000 | | 8000 | | 7000 | | 6000 | | 5000 | | 4000 | | 2300 | | 2300 | | *1220 | |
| GS 3.00° TCH 55 | | | | | | | | | | | | | | | | | |
| 3.1 NM | | 3.1 NM | | 3.1 NM | | 3.1 NM | | 3.1 NM | | 5.3 NM | | 3.4 NM | | 1.5 NM | | 0.1 NM | |
| CATEGORY | | A | | B | | C | | D | | | | | | | | | |
| S-ILS 10C | | | | 869/18 | | 200 (200-½) | | | | | | | | | | | |
| S-LOC 10C | | 1220/24 | | 551 (600-½) | | 1220/60 | | 551 (600-1¼) | | | | | | | | | |
| | | ZURSO FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) | | | | | | | | | | | | | | | |
| S-LOC 10C | | 1100/24 | | 431 (500-½) | | 1100/40 | | 431 (500-¾) | | | | | | | | | |

