RNAV (GPS) RWY 27R

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	7500
CH 69508	273°	TDZE	664
W27B		Apt Elev	680

RNP APCH.
RADAR required for procedure entry.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	128.15 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	

MISSED APCH FIX
NORTHBROOK OBK
092°
272°
9 NM

RW27R 813 (FAF) SIBLY 2200 273° (6.4) BONZO 4000 (3.1) (IF) HAREE 5000 (3.1) WELEV 6000 (3.1) IYLEK 7000 (3.1) JOKKR 8000 273° (3.1) VINYY 9000 284° (17.5) (IAF) VOGLR
807
2325
MSA RW27R 25 NM 3400

ELEV 680 D TDZE 664

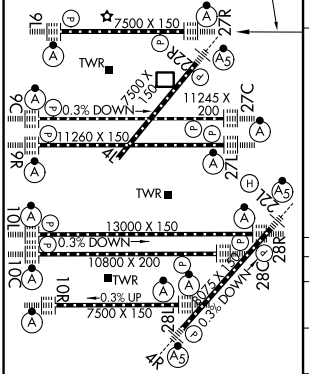

HIRL all Rwys
TDZ/CL all Rwys except 4L

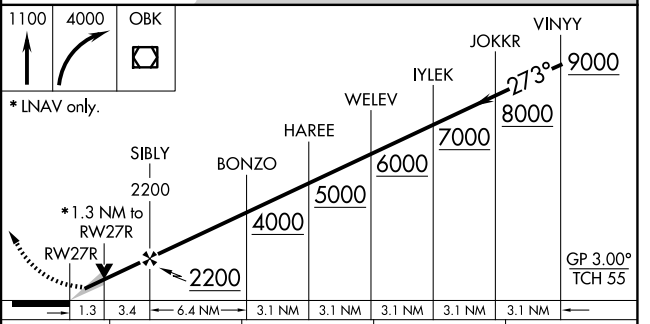

CATEGORY	A	B	C	D
LPV DA	864/18 200 (200-½)			
LNAV/VNAV DA	961/24 297 (300-½)			
LNAV MDA	1120/24 456 (500-½)		1120/45 456 (500-⅞)	

EC-3, 10 JUL 2025 to 07 AUG 2025
EC-3, 10 JUL 2025 to 07 AUG 2025