WAAS	APP CRS	Rwy Ldg	7500
CH 99508	093°	TDZE	668
W09B		Apt Elev	680

RNAV (GPS) RWY 9L

CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry. RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	128.15 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	



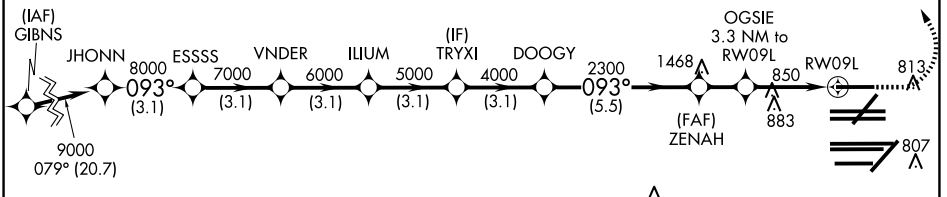

ELEV 680 D TDZE 668

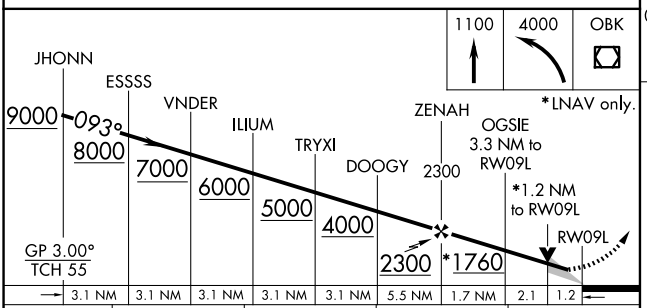

CATEGORY	A	B	C	D
LPV DA	868/18 200 (200-½)			
LNAV/VNAV DA	1034/35 366 (400-⅝)			
LNAV MDA	1100/24 432 (500-½)		1100/40 432 (500-¾)	

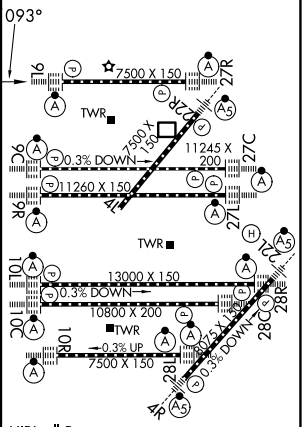

EC-3, 10 JUL 2025 to 07 AUG 2025
EC-3, 10 JUL 2025 to 07 AUG 2025