CHICAGO, ILLINOIS

RNAV (GPS) PRM Y RWY 10R
(CLOSE PARALLEL)
CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	7500
CH 77937	090°	TDZE	680
W10D		Apt Elev	680

RNP APCH.

T Simultaneous approach authorized. Dual VHF comm required. See additional requirements on AAUP. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	133.0 348.0 PRM 128.05	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	

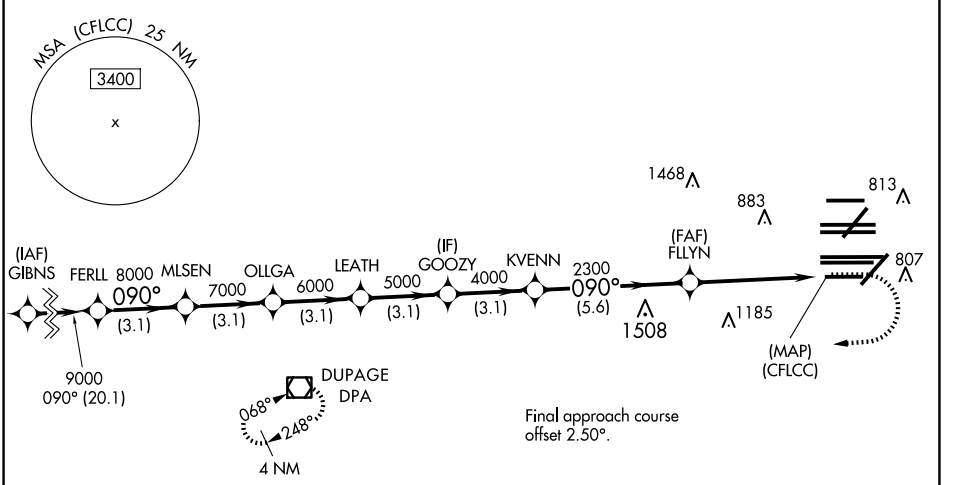

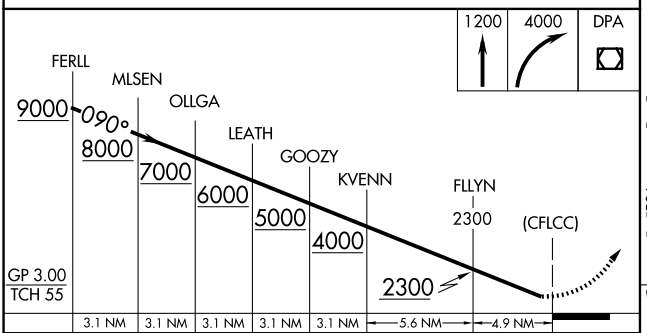

CATEGORY		A	B	C	D
LPV	DA	930/24	250 (300-½)		
LNAV/VNAV	DA	1157/50	477 (500-1)		

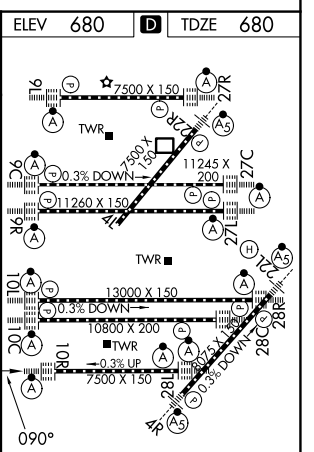

HIRL all Rwys
TDZ/CL all Rwys except 4L

EC-3, 10 JUL 2025 to 07 AUG 2025
EC-3, 10 JUL 2025 to 07 AUG 2025