

WAAS CH 69629 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	6236 2605 2613
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32


PECOS MUNI (P E Q)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH: Climb to 4600 direct WALOM and hold.

AWOS-3 118.175	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

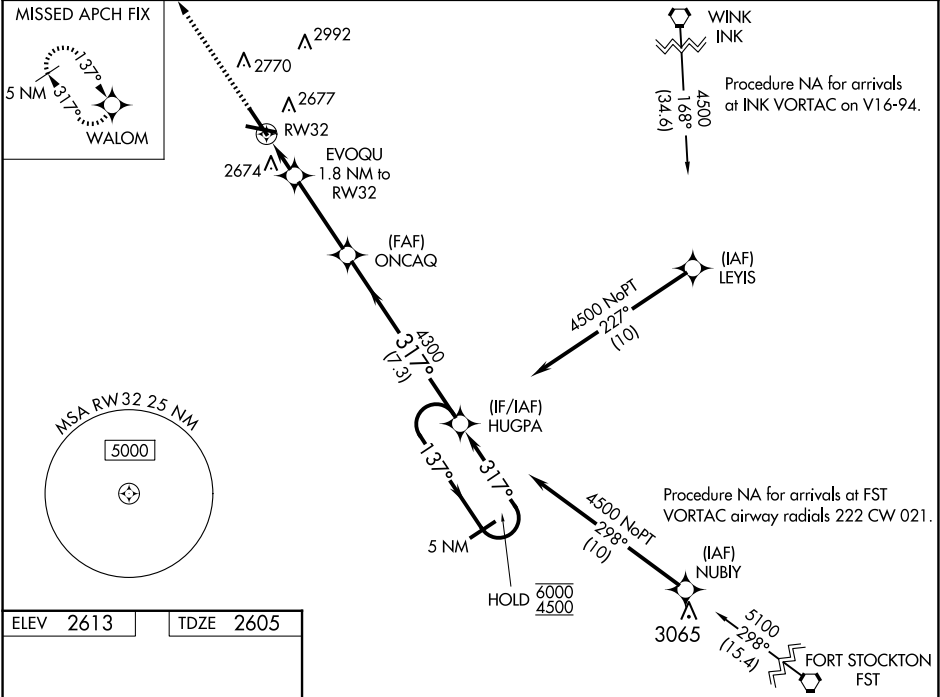

6236 X 80

5953 X 80

0.3% UP

317° to RW32

MIRL Rwy's 9-27 and 14-32

4600

↑

WALOM

✴

5 NM Holding Pattern

ONCAQ

4300

HUGPA

6000

4500

137°

317°

317°

137°

EVOQU

1.8 NM to RW32

ONCAQ

4300

3200

4300

0.9 NM to RW32

0.9 NM

3.4 NM

7.3 NM

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA		2805-¾	200 (200-¾)	
LNAV/VNAV DA		2855-¾	250 (300-¾)	
LNAV MDA		2940-1	335 (400-1)	
CIRCLING	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)