
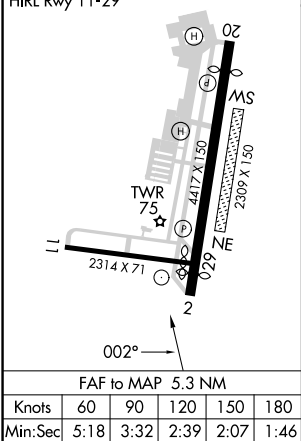


|                           |                        |  |
|---------------------------|------------------------|--|
| LOC I-HFD<br><b>109.7</b> | APP CRS<br><b>002°</b> | Rwy Idg<br>TDZE<br>Apt Elev<br><b>4006</b><br><b>17</b><br><b>18</b> |
|---------------------------|------------------------|--|

LDA RWY 2  
HARTFORD-BRAINARD (HFD)

|        |   |   |
|--------|---|---|
| ▼<br>▲ | Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 11, 20, 29 NA. Night landing: Rwy 2 operational VGSI required, remain on or above VGSI glidepath until threshold. | MISSED APPROACH: Climbing right turn to 2500 on heading 090° and PUT VOR/DME R-265 to RAMBO INT and hold. |
|--------|---|---|

|                       |   |   |                         |                          |                         |
|-----------------------|---|---|-------------------------|--------------------------|-------------------------|
| ATIS<br><b>126.45</b> | BRADLEY APP CON<br><b>127.8 269.325</b> | BRAINARD TOWER ★<br><b>119.6 (CTAF) 0 248.2</b> | GND CON<br><b>121.6</b> | CLNC DEL<br><b>121.6</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---|---|-------------------------|--------------------------|-------------------------|

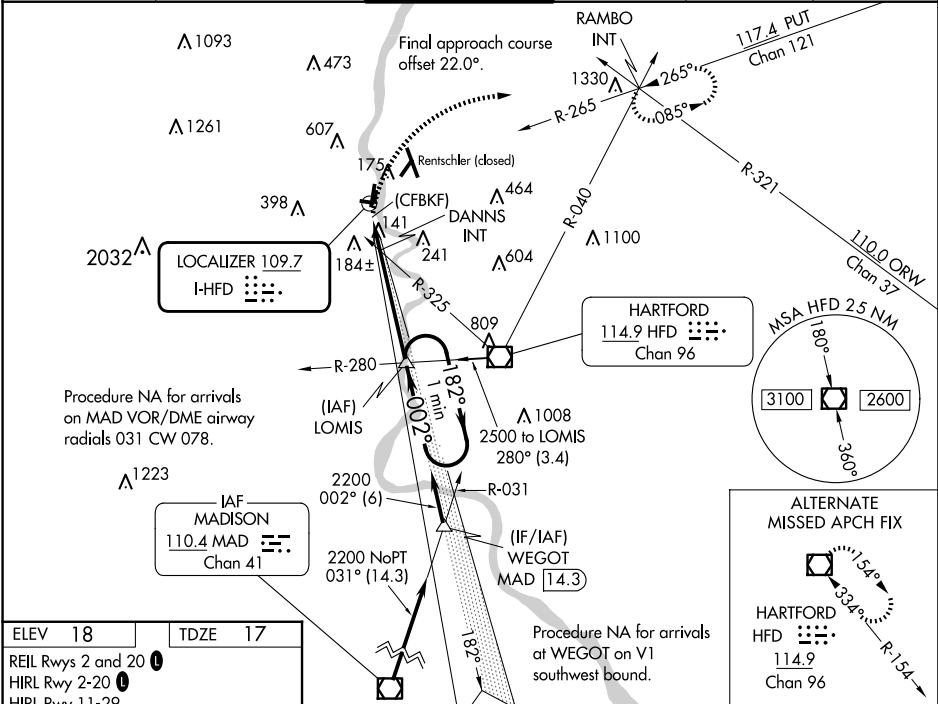

|   |             |                 |  |                            |
|---|-------------|-----------------|--|----------------------------|
| 2500  | PUT R-265   | RAMBO INT       | VGSI and descent angles not coincident (VGSI Angle 4.00/TCH 42). | One Minute Holding Pattern |
| 182°  | 002°        | 2200            | 182°   | 2500                       |
| 002°  | 002°        | 2200            | 182°   | 2500                       |
| 0.5   | 1.2 NM      | 4.1 NM          |  |                            |
| CATEGORY  | A           | B               | C  | D                          |
| S-2   | 680-1       | 663 (700-1)     | 680-1 7/8  | 663 (700-1 7/8)            |
| CIRCLING  | 680-1       | 900-1 1/4       | 920-2 3/4  | 920-3                      |
|   | 662 (700-1) | 882 (900-1 1/4) | 902 (1000-2 3/4)   | 902 (1000-3)               |
| DANNIS FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) |             |                 |  |                            |
| S-2   | 460-1       | 443 (500-1)     | 460-1 3/8  | 443 (500-1 3/8)            |
| CIRCLING  | 580-1       | 900-1 1/4       | 920-2 3/4  | 920-3                      |
|   | 562 (600-1) | 882 (900-1 1/4) | 902 (1000-2 3/4)   | 902 (1000-3)               |

NE-1, 10 JUL 2025 to 07 AUG 2025

NE-1, 10 JUL 2025 to 07 AUG 2025