

WAAS CH 46924 W28A	APCH CRS 276°	Rwy ldg TDZE Arpt Elev	9003 13 23
--------------------------	------------------	------------------------------	------------------

- (USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP APCH


* When ALS inop, increase CAT BCD to 7/8 mile.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.




MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

ATIS 124.35 290.425	APP CON/DEP CON 127.775 377.075	TOWER 125.15 (CTAF) 340.2	GND CON 128.6 336.4	CLNC DEL 134.775 0 353.675	ASR/PAR
------------------------	------------------------------------	------------------------------	------------------------	-------------------------------	---------

For uncompensated
BARO-VNAV systems,
Procedure NA below
-15°C (5°F) and
above 54°C (130°F).

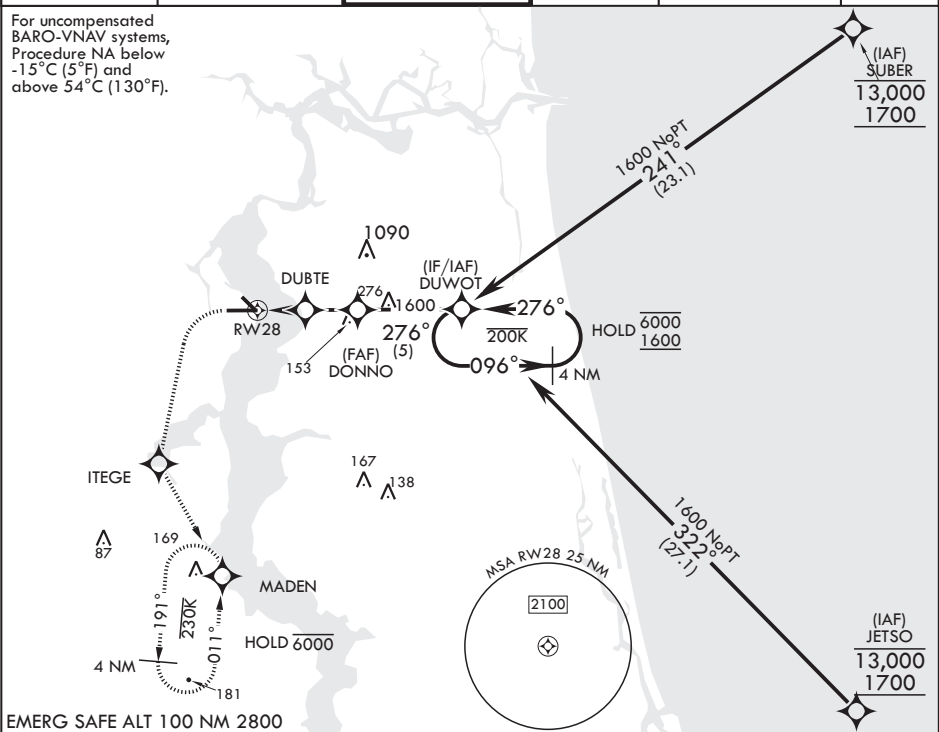


EMERG SAFE ALT 100 NM 2800




ELEV 23

TDZE 13

Rwy 10 ldg 8006'
Rwy 14 ldg 3244'

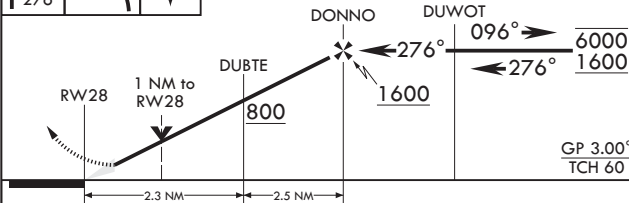

GP 3.00°
TCH 60



CATEGORY	A	B	C	D
LPV DA	213-¾	200	(200-¾)	
LNAV/VNAV DA*	263-¾ 250 (300-¾)	274-¾ 261 (300-¾)	282-¾ 269 (300-¾)	293-¾ 280 (300-¾)
LNAV MDA**	400-¾ 387 (400-¾)	400-¾ 387 (400-¾)	560-1½ 537 (600-1½)	780-2½ 757 (800-2½)
CIRCLING	500-1 477 (500-1)			

HIRL Rwy 10-28