


WAAS CH <b>90210</b> <b>W23B</b>	APP CRS <b>231°</b>	Rwy Idg TDZE <b>965</b> Apt Elev <b>986</b>
--	------------------------	---

RNAV (GPS) RWY 23L

MC GHEE TYSON(T'YS)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1600 then climb to 3000 direct GROSS and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10° C or above 54° C.			
ATIS <b>128.35</b>	KNOXVILLE APP CON <b>123.9 360.8</b>	KNOXVILLE TOWER <b>121.2 257.8</b>	GND CON <b>121.9 348.6</b>
		CLNC DEL <b>121.65</b>	

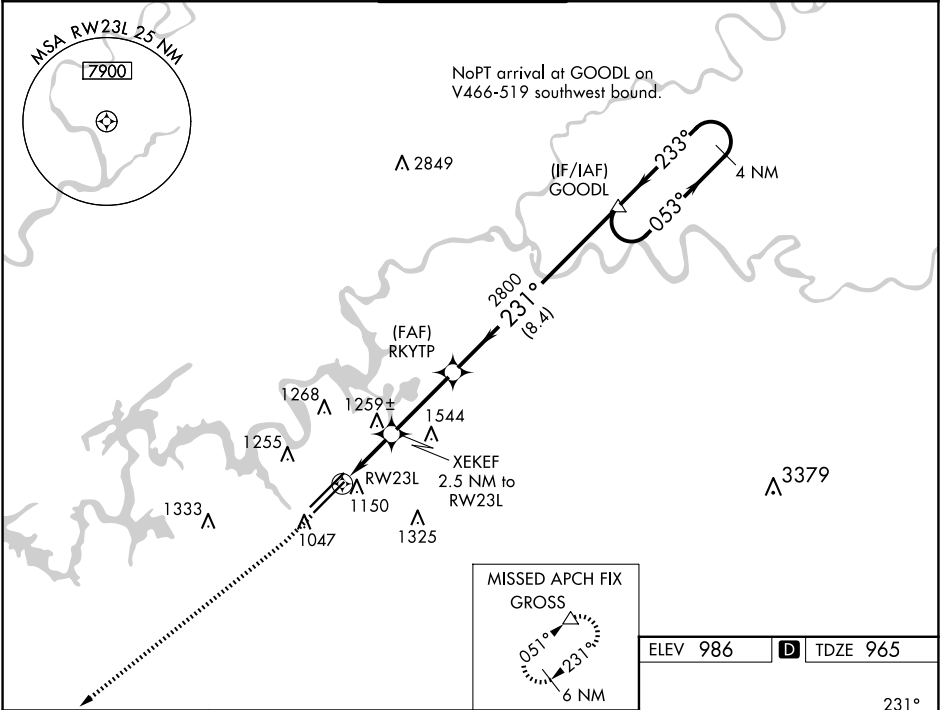

1600		3000	GROSS
↑		↑	△
CATEGORY	A	B	C
LPV DA	1165/40		200 (200-¾)
LNAV/VNAV DA	1383-1⅓		418 (500-1⅓)
LNAV MDA	1520/55	555 (600-1)	1520-1⅓ 555 (600-1⅓)
CIRCLING	1520-1 534 (600-1)	1620-1 634 (700-1)	1660-2 674 (700-2) 1900-3 914 (1000-3)

