


WAAS CH 48802 W05A	APP CRS 051°	Rwy Idg 9508 TDZE 953 Apt Elev 986
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 5L

MC GHEE TYSON (TYS)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.
<div><div>T</div><div>A</div></div> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. * RVR 1800 authorized with use of FD or AP or HUD to DA.		<div><div>A5</div><div></div></div>	

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	-----------------------------------------	---------------------------------------	-------------------------------	---------------------------

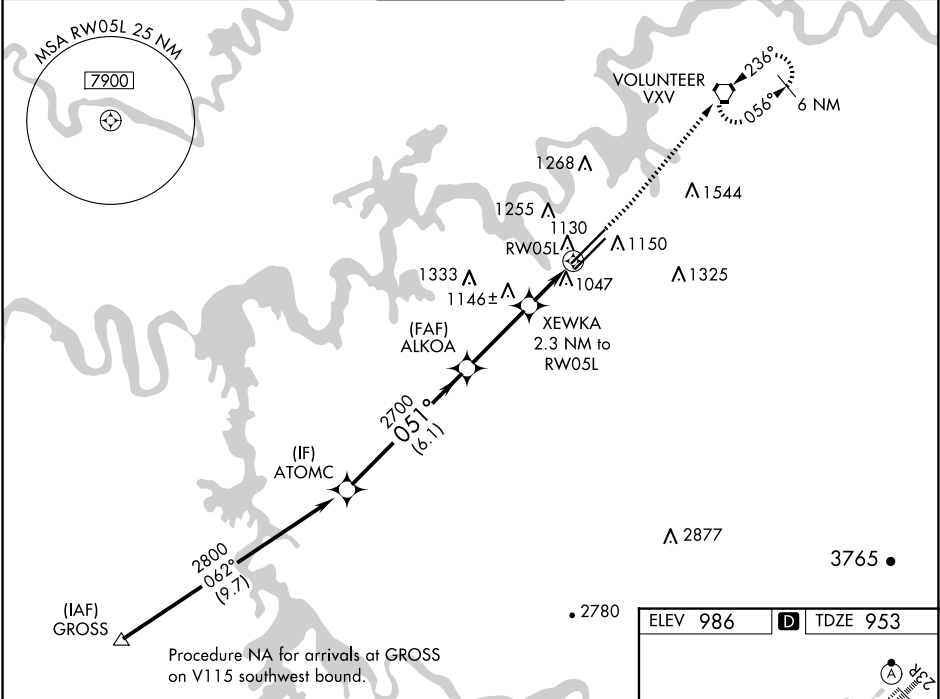

ATOMIC		ALCOA	XEWKA 2.3 NM to RW05L	1500	4000	VXV
2800		2700	1700	1.2 NM to RW05L		
GP 3.00° TCH 55		6.1 NM	3.1 NM	1.1 NM	1.2 NM	
CATEGORY	A	B	C	D		
LPV DA*	1153/24		200 (200-½)			
LNAV/VNAV DA	1291/26		338 (400-½)			
LNAV MDA	1380/24		427 (400-½)			
CIRCLING	1500-1		1560-1			
	514 (600-1)		574 (600-1)			
	1660-2		1900-3			
	674 (700-2)		914 (1000-3)			

