APP CRS	Rwy Ldg	8566
071°	TDZE	119
	Apt Elev	128

RNAV (RNP) Z RWY 6L

LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 3000 on track 071° to ZANAV and on track 042° to AMTRA and hold.

D-ATIS	SOCAL APP CON				LOS ANGELES TOWER	GND CON	CLNC DEL	CPDLC
ARR 133.8	124.3	363.2	124.9	269.0	N 133.9 239.3	N 121.65 327.0	120.35	
DEP 135.65	(APCH FM WEST)		(090°-224°)		S 120.95 379.1	S 121.75 327.0	327.0	
	124.5	235.975	128.5	360.7		W 121.4 327.0		
	(225°-044°)		(045°-089°)					

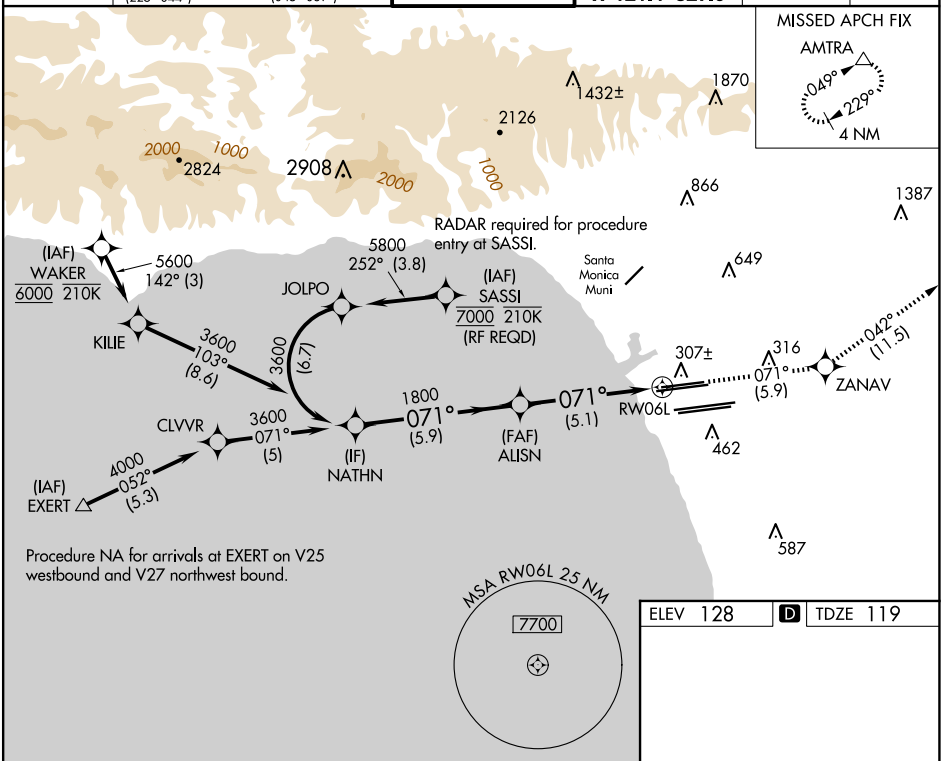

SW-3, 10 JUL 2025 to 07 AUG 2025

SW-3, 10 JUL 2025 to 07 AUG 2025

ELEV 128 D TDZE 119



TDZ/CL Rwys 6R, 7L, 24R, and 25L
HIRL all Rwys

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

3000	ZANAV	tr	AMTRA
tr 071°		042°	

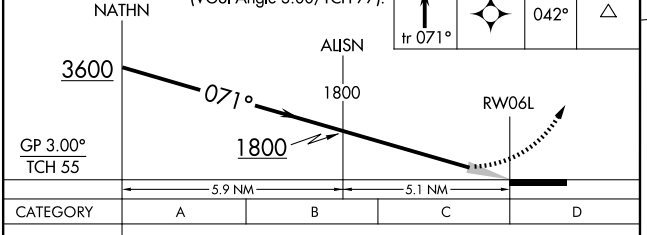

CATEGORY	A	B	C	D
RNP 0.30 DA	484/40	365 (400-¾)		

AUTHORIZATION REQUIRED