WAAS CH 57909 W17A	APP CRS 170°	Rwy Idg 10000 TDZE 485 Apt Elev 501

RNAV (GPS) Y RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.

T A Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to RVR 6000.

MALSR (A5)

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct DAMEN and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

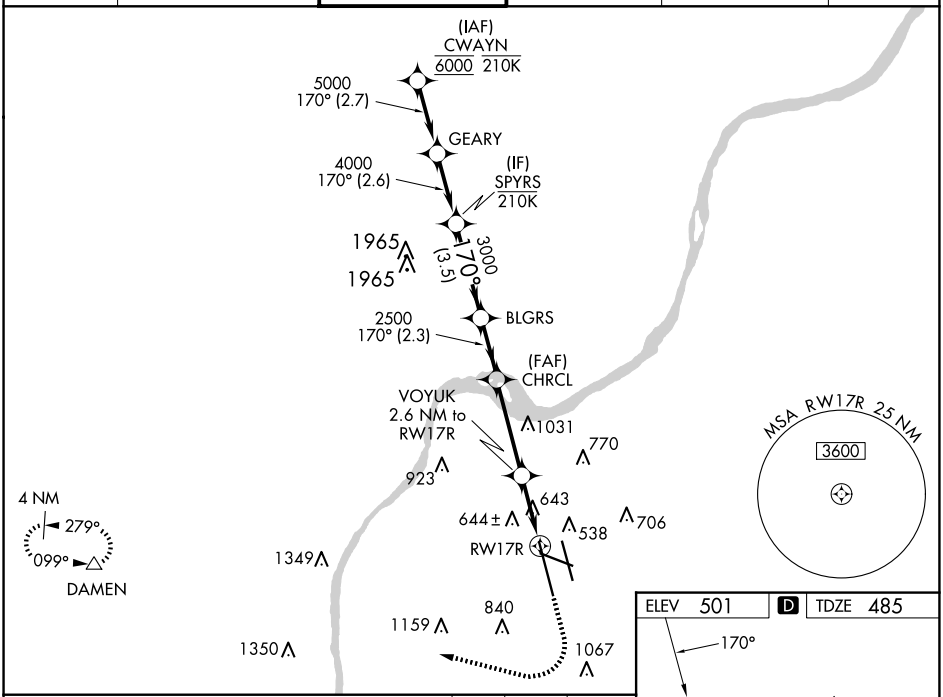

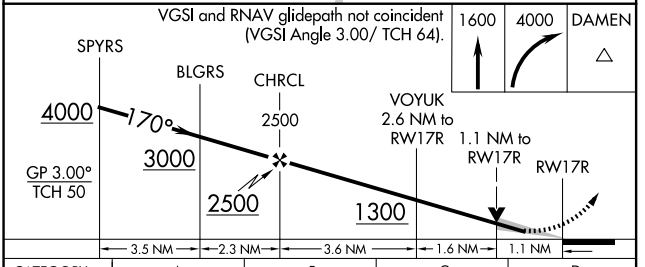

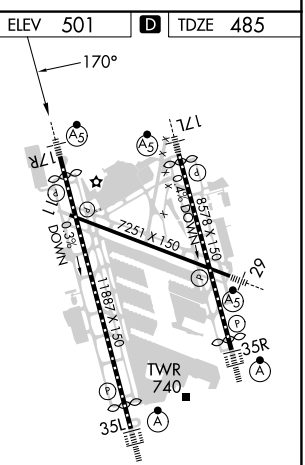

CATEGORY	A	B	C	D
LPV DA	685/18	200 (200-½)		
LNAV/VNAV DA	900/40	415 (400-¾)		
LNAV MDA	900/24	415 (400-½)	900/40	415 (400-¾)
C CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L, and 35R

SE-1, 10 JUL 2025 to 07 AUG 2025
SE-1, 10 JUL 2025 to 07 AUG 2025