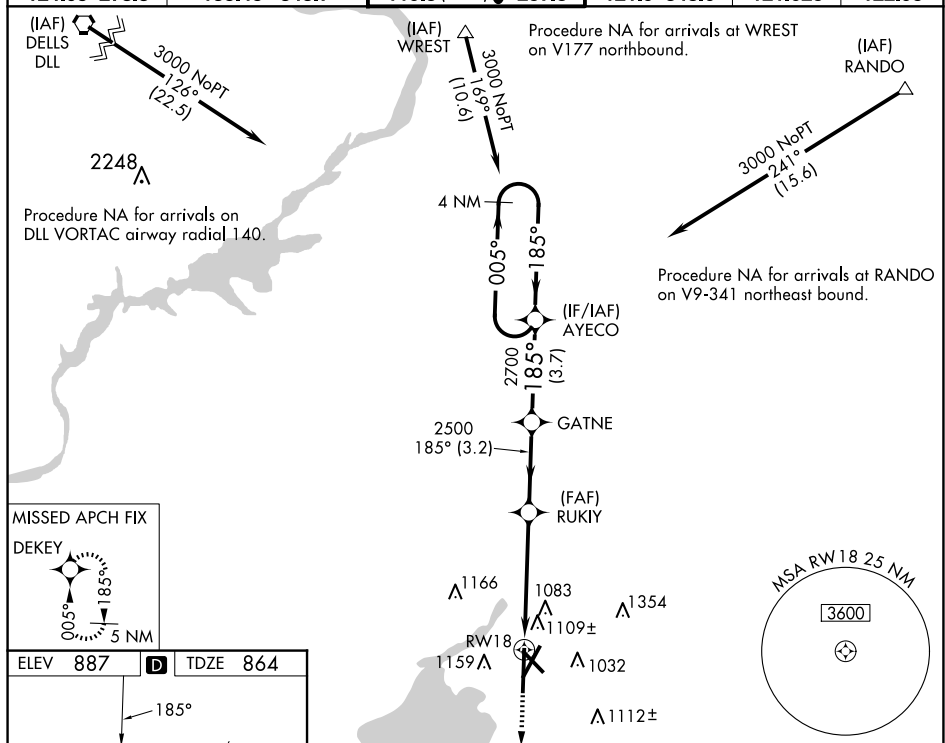


WAAS CH 42522 W18A	APP CRS 185°	Rwy Idg 8606 TDZE 864 Apt Elev 887
--	------------------------	---

RNAV (GPS) RWY 18

<div><div></div><div></div></div>	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1% mile and LNAV Cat C/D visibility to 1% miles. ** RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR <div><div></div><div></div></div>	MISSED APPROACH: Climb to 3000 direct DEKEY and hold.	
	ATIS 124.65 278.3	MADISON APP CON ★ 135.45 343.7	MADISON TOWER ★ 119.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.625	UNICOM 122.95

[illegible]