RNAV (GPS) RWY 4

KEY FLD (MEI)

WAAS CH 42533 W04A	APP CRS 046°	Rwy Ldg 5052 / TDZE 295 / Apt Elev 298

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwys 1 and 22. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet; increase LPV and LNAV/VNAV all Cats visibilities ½ mile, LNAV Cats C/D visibility ½ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA with Hattiesburg/Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct PAULD and hold.

ATIS	MERIDIAN APP CON ★	KEY TOWER ★	GND CON	CLNC DEL	UNICOM
126.475 291.675	120.5 269.325	133.975 (CTAF) L 257.8	121.9 348.6	121.9 348.6	122.95

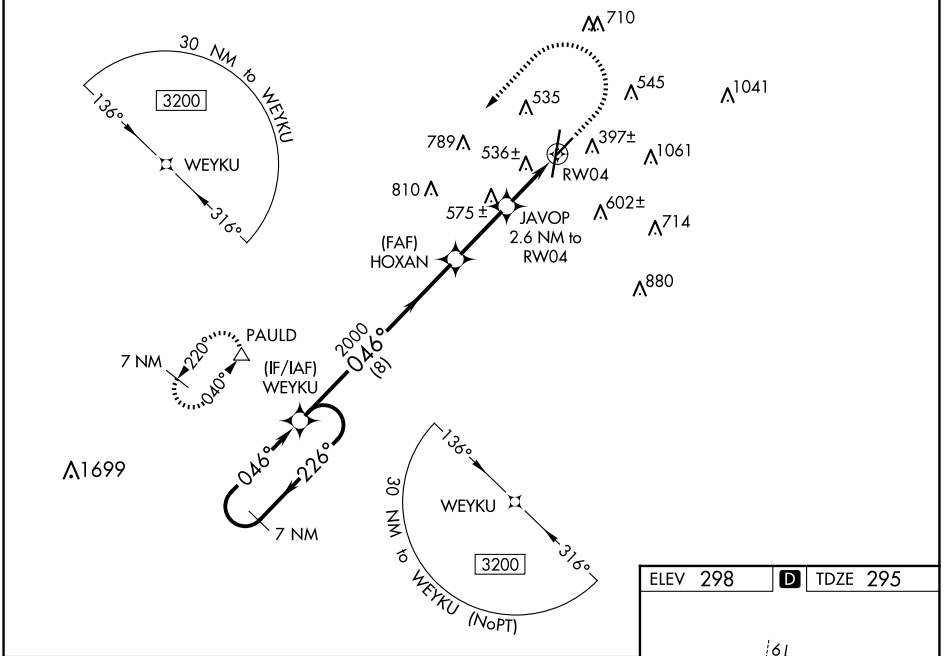

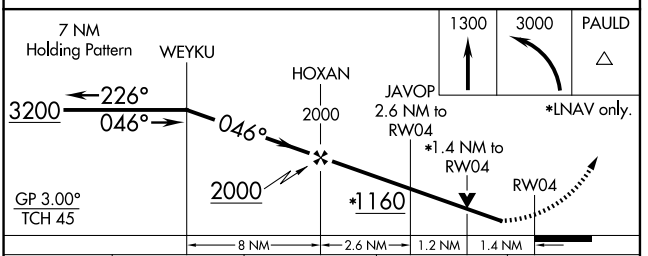

CATEGORY	A	B	C	D
LPV DA	576-⅞ 281 (300-⅞)			
LNAV/VNAV DA	849-1⅞ 554 (600-1⅞)			
LNAV MDA	800-1 505 (600-1)		800-1⅜ 505 (600-1⅜)	
C CIRCLING	860-1 562 (600-1)	880-1 582 (600-1)	960-1¾ 662 (700-1¾)	1120-2¾ 822 (900-2¾)

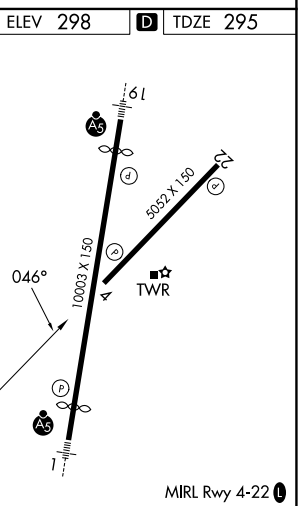

SC-4, 10 JUL 2025 to 07 AUG 2025
SC-4, 10 JUL 2025 to 07 AUG 2025