FLMGO TWO DEPARTURE(RNAV) Departure Routes

MIAMI INTL (MIA)
MIAMI, FLORIDA

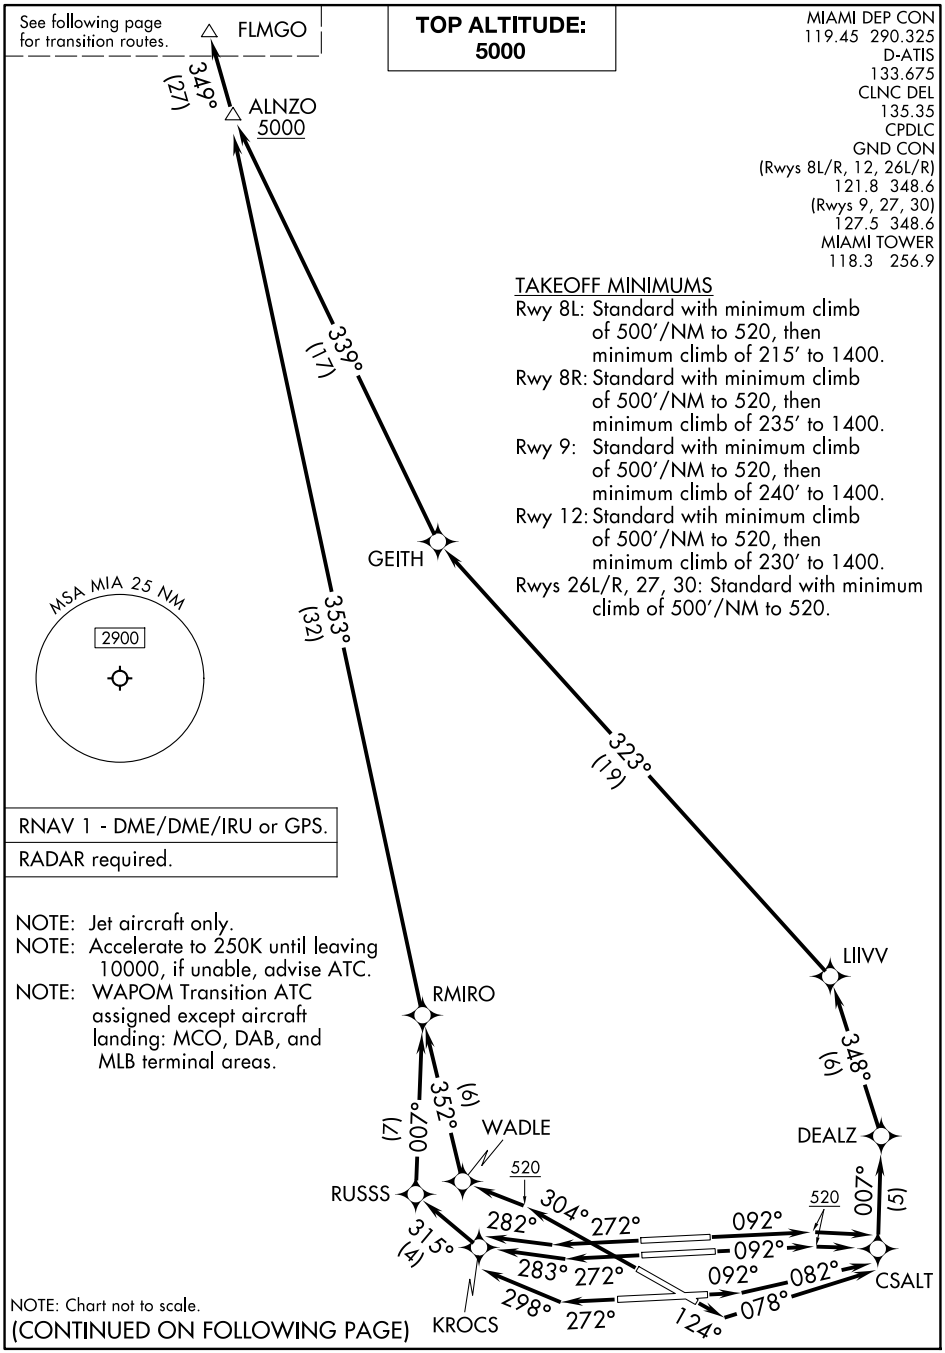

TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500′/NM to 520, then minimum climb of 215′ to 1400.

Rwy 8R: Standard with minimum climb of 500′/NM to 520, then minimum climb of 235′ to 1400.

Rwy 9: Standard with minimum climb of 500′/NM to 520, then minimum climb of 240′ to 1400.

Rwy 12: Standard wtih minimum climb of 500′/NM to 520, then minimum climb of 230′ to 1400.

Rwys 26L/R, 27, 30: Standard with minimum climb of 500′/NM to 520.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-3, 10 JUL 2025 to 07 AUG 2025

FLMGO TWO DEPARTURE(RNAV) Departure Routes

MIAMI, FLORIDA
MIAMI INTL (MIA)