# HURCN FOUR DEPARTURE (RNAV) Transition Routes

RNAV-1 DME/DME/IRU or GPS.
RADAR required.

**TOP ALTITUDE: 5000**

MIAMI DEP CON
119.45 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/R, 12, 26L/R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9




TAKEOFF MINIMUMS

Rwy 8L: Standard with minimum climb of 500′/NM to 520, then minimum climb of 215′ to 1400.
Rwy 8R: Standard with minimum climb of 500′/NM to 520, then minimum climb of 235′ to 1400.
Rwy 9: Standard with minimum climb of 500′/NM to 520, then minimum climb of 240′ to 1400.
Rwy 12: Standard with minimum climb of 500′/NM to 520, then minimum climb of 230′ to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500′/NM to 520.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

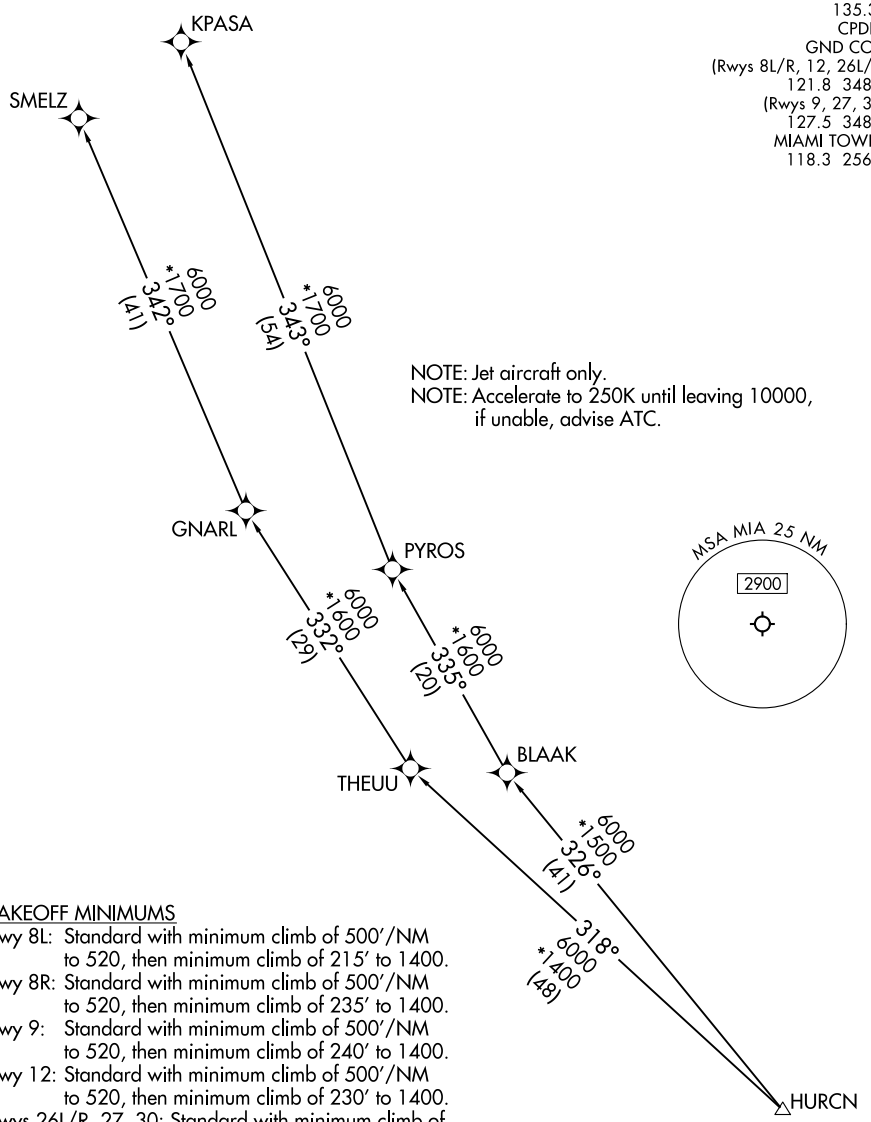

SE-3, 10 JUL 2025 to 07 AUG 2025
SE-3, 10 JUL 2025 to 07 AUG 2025