MINNEAPOLIS NINE DEPARTURE

AL-264 (FAA) MINNEAPOLIS, MINNESOTA

RADAR required.

TOP ALTITUDE: ASSIGNED BY ATC

MINNEAPOLIS DEP CON
SOUTH/EAST 124.7 284.7
NORTH/WEST 125.75 335.65
D-ATIS DEP
120.8
CLNC DEL
133.2
CPDLC
MINNEAPOLIS TOWER
123.95 273.55 (12L-30R)
126.7 273.55 (12R-30L, 4-22)
123.675 273.55 (17-35)

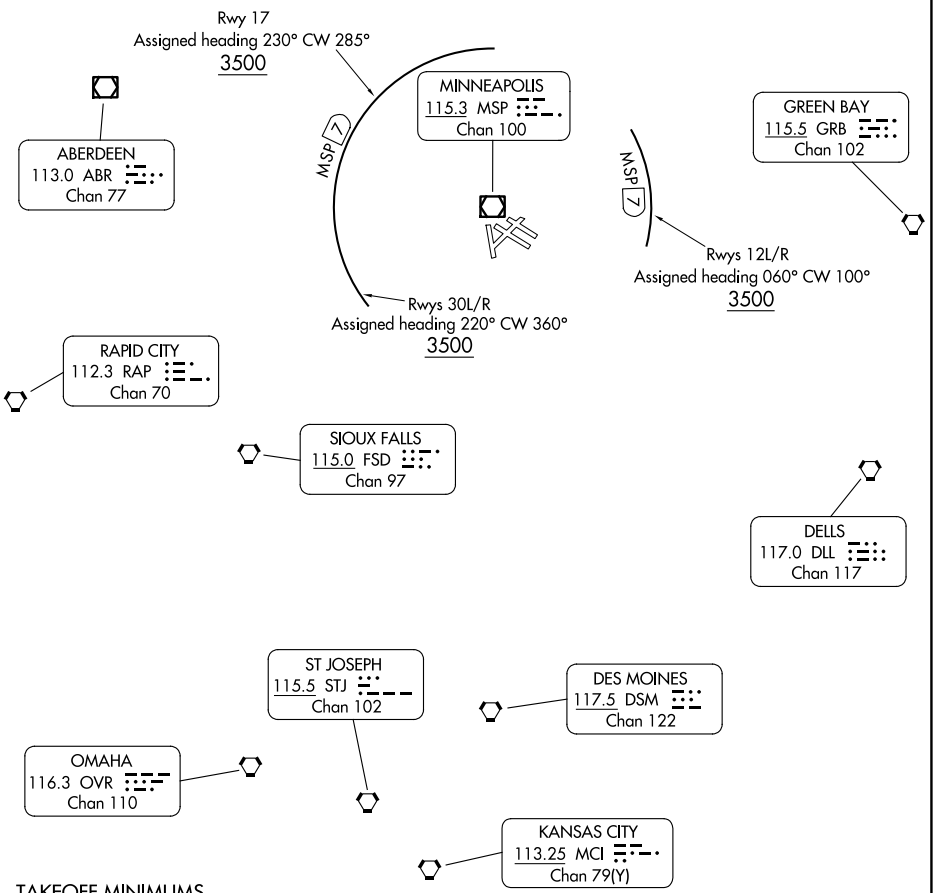

TAKEOFF MINIMUMS

Rwys 12R, 17, 22: Standard.
Rwy 4: Standard with minimum climb of 202 to 2400.
Rwy 12L: Standard with minimum climb of 277 to 1100.
Rwy 30L: Standard with minimum climb of 208 to 2000.
Rwy 30R: Standard with minimum climb of 217 to 2000.
Rwy 35: Standard with minimum climb of 219 to 2000.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

NC-1, 10 JUL 2025 to 07 AUG 2025
NC-1, 10 JUL 2025 to 07 AUG 2025