

WAAS CH 70510 W22A	APP CRS 222°	Rwy Idg 7504 TDZE 78 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 22
MONROE RGNL (MLU)

RNP APCH


 Circling Rwy 14 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM.

MALSR




MISSED APPROACH: Climb to 3000 direct KUYRE and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON ★ 118.15 290.475	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

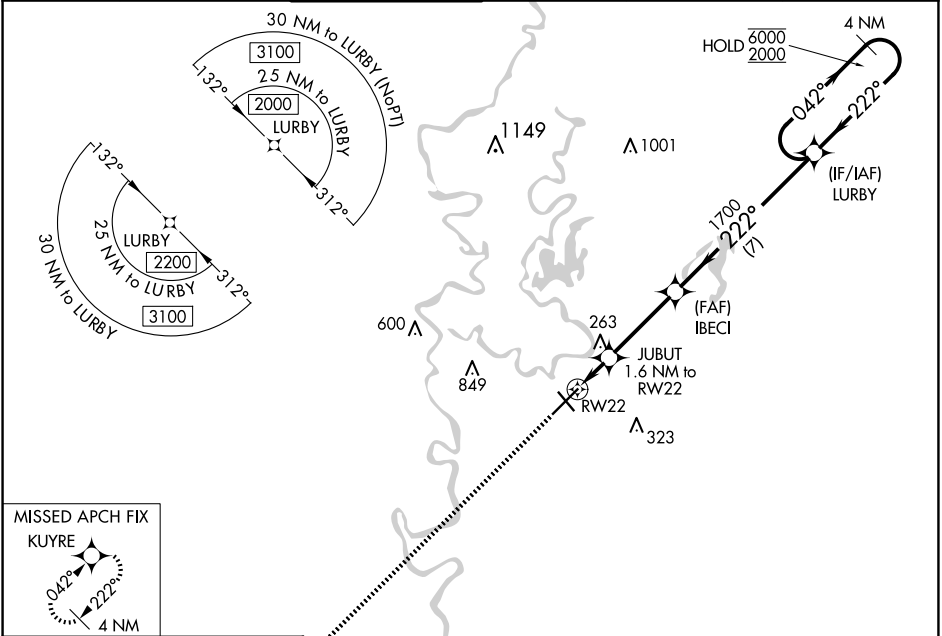

ELEV 79	D	TDZE 78
----------------	----------	----------------



REIL Rwy 14 and 32
MIRL Rwy 14-32 0
HIRL Rwy 4-22 0

3000 KUYRE		LURBY 4 NM Holding Pattern	
* LNAV only.		JUBUT 1.6 NM to RW22	
RW22		IBECI 1700	
620*		1700	
1.6 NM		3.4 NM	
7 NM		4 NM	
042°		222°	
6000		2000	
GP 3.00°		TCH 50	
CATEGORY	A	B	C
LPV DA	278-½	200 (200-½)	
LNAV/VNAV DA	534-1	456 (500-1)	
LNAV MDA	520-½ 442 (500-½)	520-¾ 442 (500-¾)	
CIRCLING	540-1 461 (500-1)	580-1 501 (600-1)	740-1¾ 661 (700-1¾) 1160-3 1081 (1100-3)