RNAV (GPS) RWY 4L

NEWARK LIBERTY INTL (EWR)

WAAS CH 56224 W04A	APP CRS 039°	Rwy Idg 8459 TDZE 10 Apt Elev 17

RNP APCH - GPS.

When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.

MALSR

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 520, then climbing right turn to 2000 direct TYNIE, and on track 015° to NEBTE, cross NEBTE at or below 2000, then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

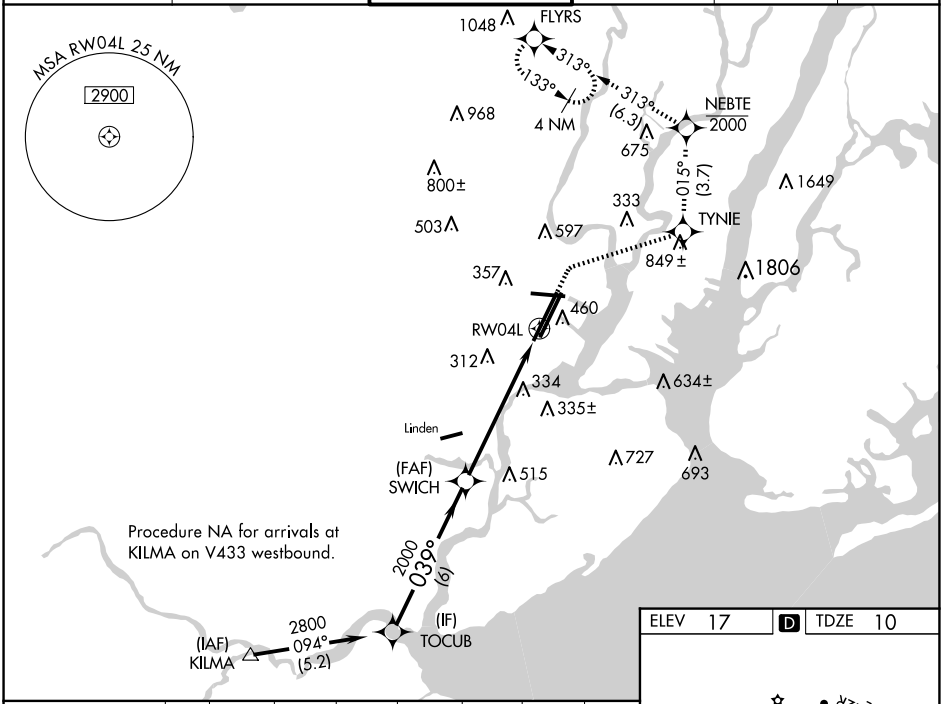

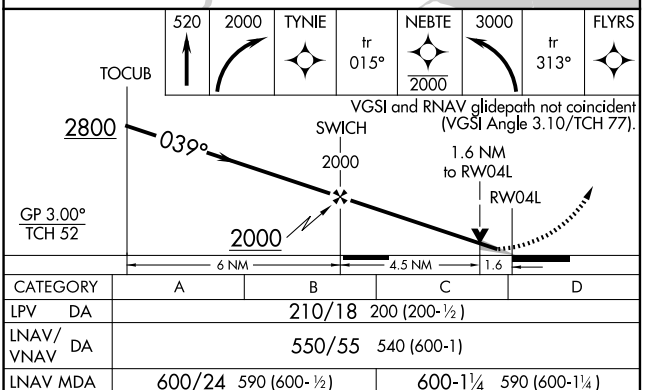

CATEGORY	A	B	C	D
LPV DA	210/18 200 (200-½)			
LNAV/VNAV DA	550/55 540 (600-1)			
LNAV MDA	600/24 590 (600-½)		600-1¼ 590 (600-1¼)	
C CIRCLING	760-1 743 (800-1)		900-2¾ 883 (900-2¾)	900-3 883 (900-3)

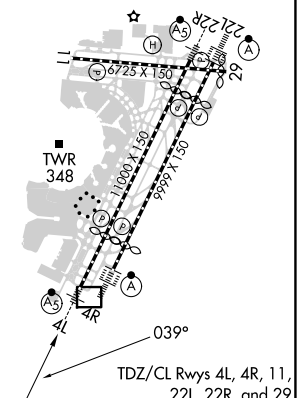

NE-2, 10 JUL 2025 to 07 AUG 2025
NE-2, 10 JUL 2025 to 07 AUG 2025