RNAV (GPS) Y RWY 4R

NEWARK LIBERTY INTL (EWR)

WAAS CH 60924 W04B	APP CRS 039°	Rwy Idg 8809 TDZE 11 Apt Elev 17

RNP APCH - GPS.
RADAR required.
When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

ALSF-2

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 550 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

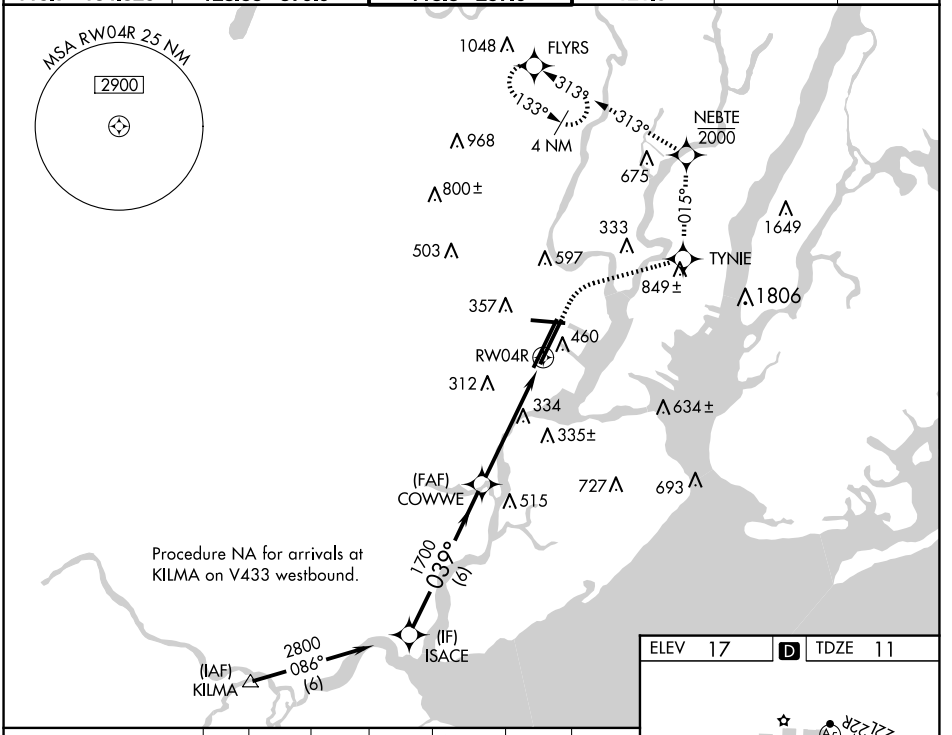



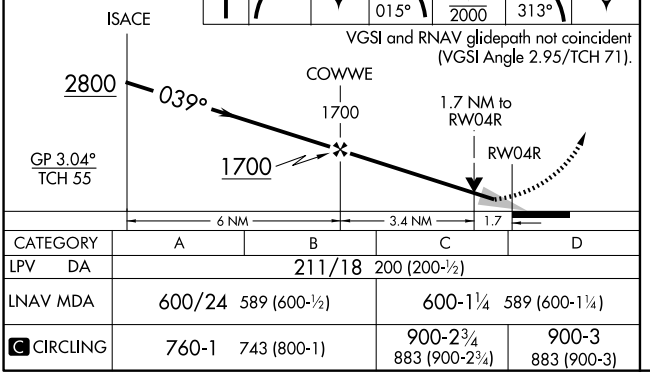

VGSI and RNAV glidepath not coincident (VGSI Angle 2.95/TCH 71).

CATEGORY	A	B	C	D
LPV DA	211/18 200 (200-½)			
LNAV MDA	600/24 589 (600-½)		600-1¼ 589 (600-1¼)	
C CIRCLING	760-1 743 (800-1)		900-2¾ 883 (900-2¾)	900-3 883 (900-3)

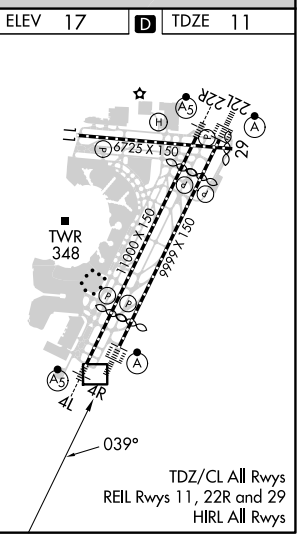

TDZ/CL All Rwys
REIL Rwys 11, 22R and 29
HIRL All Rwys

NE-2, 10 JUL 2025 to 07 AUG 2025
NE-2, 10 JUL 2025 to 07 AUG 2025