

WAAS CH 86439 W04A	APP CRS 043°	Rwy Idg 5132 TDZE 1080 Apt Elev 1087
--	------------------------	---


RNAV (GPS) RWY 4
NEW CENTURY AIRCENTER (IXD)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using OJC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use OJC altimeter setting: increase LPV DA to 1348 feet and LNAV/VNAV DA to 1448 feet and all MDA 20 feet; increase LNAV Cat C/D visibility 1/8 SM.

MISSED APPROACH: Climb to 3100 direct FALOV and hold.

ASOS 135.325	KANSAS CITY APP CON 118.9 251.075	NEW CENTURY TOWER ★ 133.0 (CTAF) 0	GND CON 124.3	UNICOM 122.95
-----------------	--------------------------------------	---------------------------------------	------------------	------------------

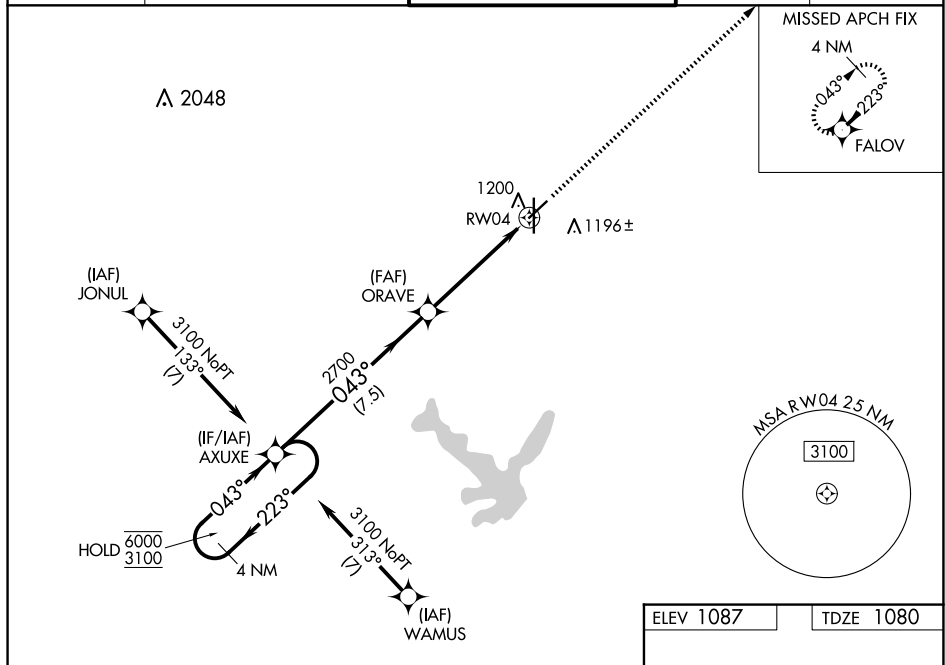

VGSI and RNAV glidepath not coincident.
(VGSI Angle 3.00/TCH 41)

4 NM Holding Pattern

6000
3100

← 223°
043° →

GP 3.00°
TCH 41

AXUXE

ORAVE

2700

0.43°

2700

1.2 NM to RW04

RW04

7.5 NM

3.8 NM

1.2 NM

CATEGORY	A	B	C	D
LPV DA	1330-1 250 (300-1)			
LNAV/ RNAV DA	1430-1¼ 350 (400-1¼)			
LNAV MDA	1500-1 420 (500-1)		1500-1⅛ 420 (500-1⅛)	
C CIRCLING	1560-1 473 (500-1)		1580-1½ 493 (500-1½)	1640-2 553 (600-2)