
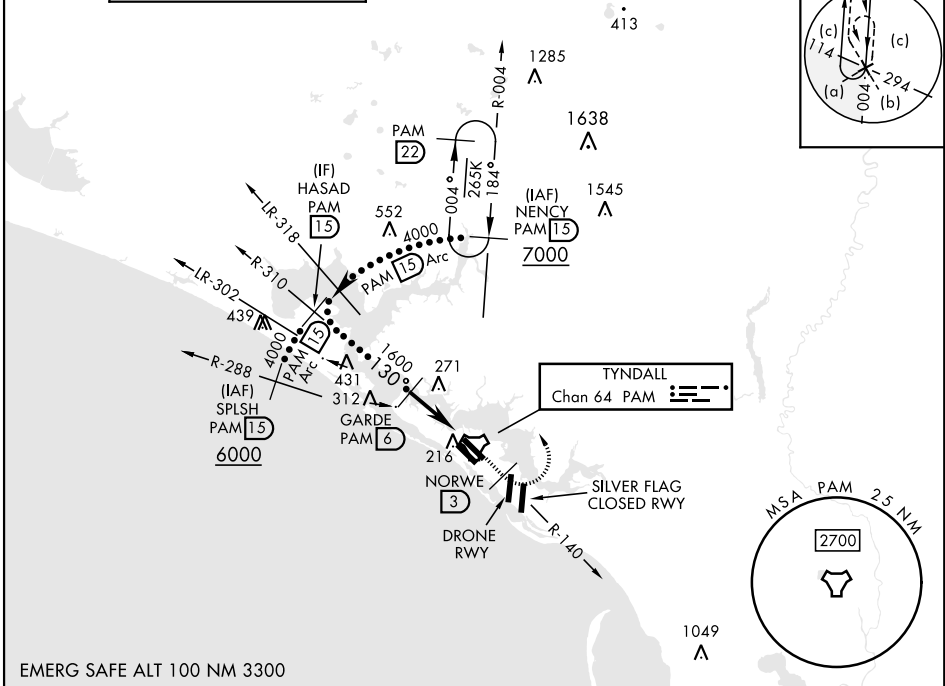
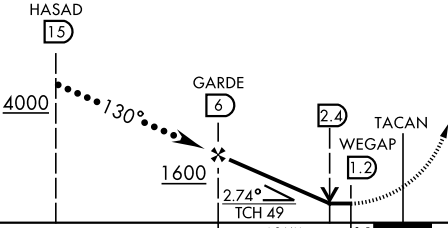


TACAN PAM Chan <b>64</b>	APCH CRS <b>130°</b>	Rwy Ldg <b>10,008</b> TDZE <b>14</b> Arpt Elev <b>17</b>	[USAF]	TYNDALL AFB (KPAM)
* When ALS inop, increase vis to 1¾ miles.				
ALSF-1 				
MISSED APPROACH: Track outbound PAM TACAN R-140 to 3 DME (NORWE), then turn left to join PAM R-004 to 15 DME (NENCY) and hold. Maintain 3000.				

ATIS ★ <b>254.4</b>	APP CON <b>125.2</b> <b>392.1</b> (N abv 5000') <b>120.825</b> <b>379.3</b> (N blw 5000') <b>124.15</b> <b>338.35</b> (S abv 5000') <b>119.775</b> <b>317.45</b> (S blw 5000')	TOWER ★ <b>133.95</b> <b>263.15</b>	GND CON <b>121.9</b> <b>259.3</b>	CLNC DEL <b>118.05</b> <b>348.7</b>	ASR/PAR
------------------------	--	--	--------------------------------------	--	---------



VGSI and descent angles not coincident (VGSI Angle 2.50/TCH 49).			ELEV 17	TDZE 14
			HIRL all Rwys Rwy 32L Ldg 9135'	
CATEGORY	C	D	E	
S-14L*	500/50	486	(500-1)	
CIRCLING	540-1½ 523 (600-1½)	580-2 563 (600-2)	620-2¼ 603 (700-2¼)	Recommend Rwy 14L-32R for apch end engagement of A-Gear.