


APP CRS	Rwy Idg	9500
087°	TDZE	13
	Apt Elev	36

RNAV (RNP) Z RWY 9L

PHILADELPHIA INTL (PHL)

RNP AR APCH - GPS.	MALSR
<div><div>▼</div><div>For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 6000 and RNP 0.30 visibility all Cats to 1% SM.</div></div>	<div><div><div>AS</div><div><div></div><div></div><div></div></div></div><div>MISSED APPROACH: Climb to 3000 on track 087° to CUBUT and on track 173° to FIDAX and on track 259° to OOD VORTAC and hold.</div></div>

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

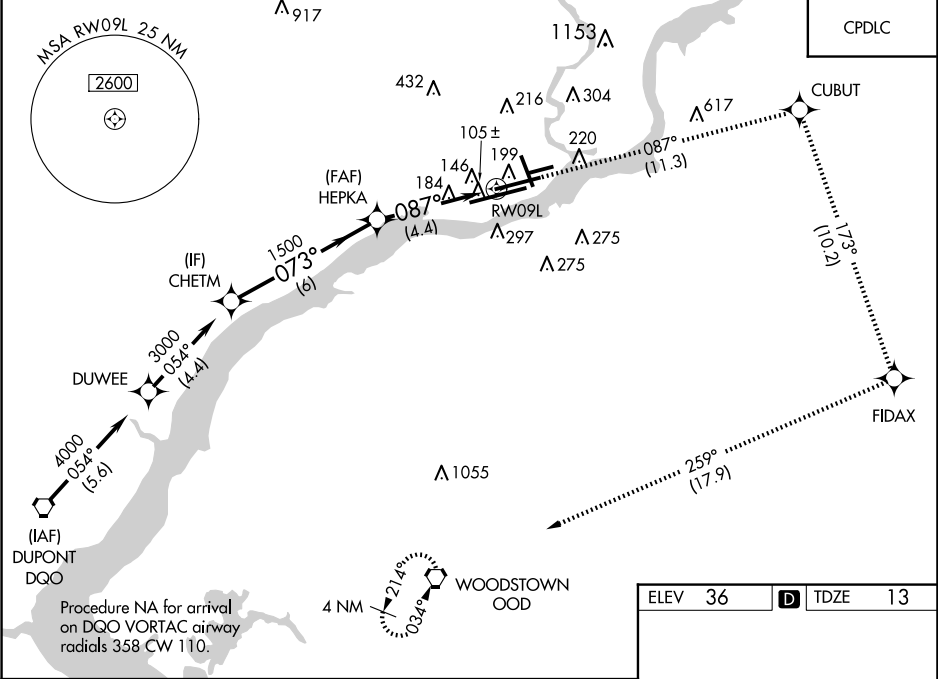

3000		↑	tr 087°	CUBUT	tr 173°	FIDAX	tr 259°	OOD
CHETM								
3000								
GP 3.00°								
TCH 58								
6 NM								
4.4 NM								
CATEGORY	A	B	C	D				