


WAAS CH <b>65623</b> <b>W31A</b>	APP CRS <b>313°</b>	Rwy Idg TDZE <b>1720</b> Apt Elev <b>1744</b>
--	------------------------	---

RNAV (GPS) RWY 31

PIERRE RGNL (PIR)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALSR 	MISSED APPROACH: Climb to 4000 direct FASIP and hold.
---	-----------	---

ASOS <b>119.025</b>	MINNEAPOLIS CENTER <b>125.1 269.1</b>	CTAF <b>122.70</b>	UNICOM <b>122.95</b>
------------------------	--	-----------------------	-------------------------

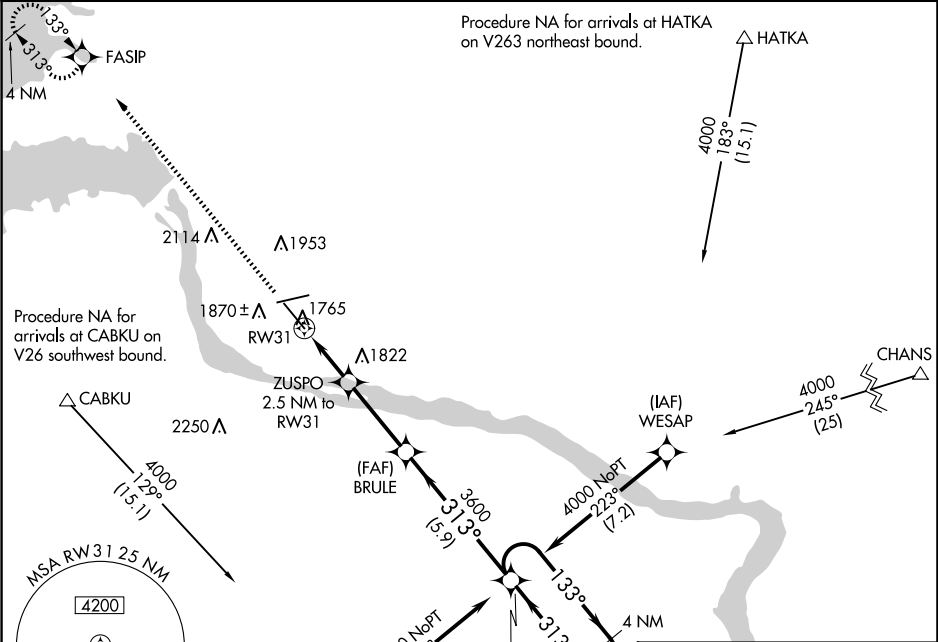

ELEV 1744 TDZE 1720				
CATEGORY	A	B	C	D
LPV DA		1920-½	200 (200-½)	
LNAV/VNAV DA		1970-½	250 (300-½)	
LNAV MDA		2020-½	300 (300-½)	
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)	2460-2¼ 716 (800-2¼)

