





WAAS CH 70531 W08A	APP CRS 080°	Rwy Idg TDZE 4671 Apt Elev 4729
--	------------------------	---

RNAV (GPS) RWY 8R

PUEBLO MEML (PUB)

RNP APCH-GPS.			MALSR	MISSED APPROACH: Climb to 7000 direct HELER and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to ¾ SM.					
ATIS 125.25	DENVER APP CON ★ 120.1 290.5	PUEBLO TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 120.9	UNICOM 122.95

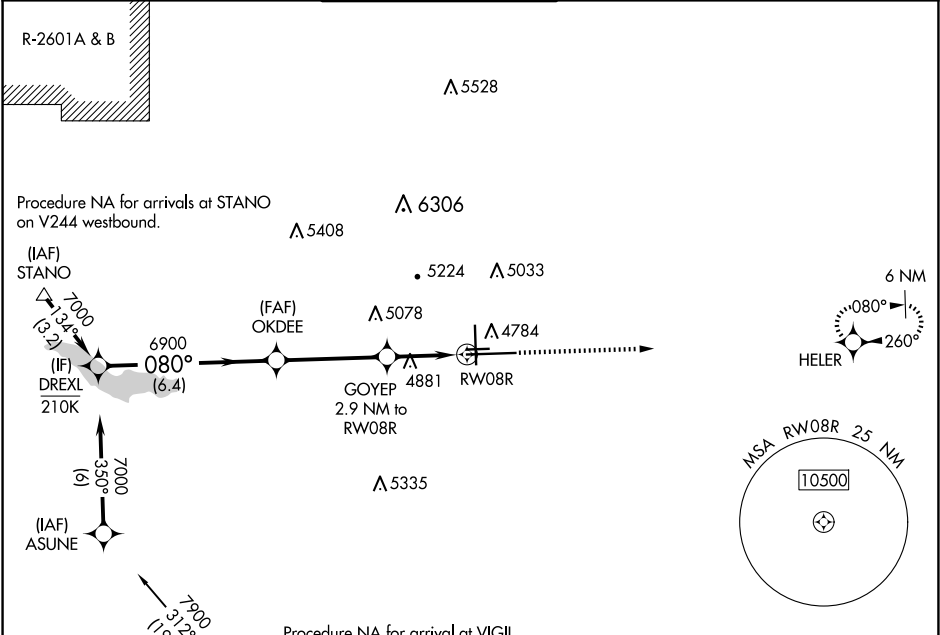

 VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 63).					ELEV 4729 D TDZE 4671	
DREXL 7000 080° 6900 GP 3.00° TCH 60 OKDEE 6900 GOYEP 2.9 NM to RW08R *1.5 NM to RW08R *5640 RW08R *LNAV only 7000 HELER						
CATEGORY	A	B	C	D		
LPV DA	4871-½		200 (200-½)			
LNAV/VNAV DA	4982-½		311 (300-½)			
LNAV MDA	5200-½	529 (500-½)	5200-1	529 (500-1)		
 CIRCLING	5340-1	611 (700-1)	5580-2½ 851 (900-2½)	5800-3 1071 (1100-3)		