# ILS or LOC RWY 34

## ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

| LOC I-ROA | APP CRS | Rwy Idg | 5810 |
|---|---|---|---|
| 109.7 | 336° | TDZE | 1160 |
| | | Apt Elev | 1175 |

DME required for procedure entry. ADF or RADAR required.

For inop ALS, increase S-ILS 34 # all Cats visibility to 1⅜ SM. Circling NA northwest of Rwy 6-24.

-13°C Inop table does not apply to S-ILS 34 all Cats.

MALSR

MISSED APPROACH: Climb to 2300 then climbing left turn to 4500 direct VIT NDB and hold. Continue climb-in-hold to 4500. # Missed approach requires minimum climb of 425 feet perNM to 3700.

| ATIS | ROANOKE APP CON | ROANOKE TOWER | GND CON | CLNC DEL |
|---|---|---|---|---|
| 132.375 | 126.9 339.8 | 118.3 257.8 | 121.9 257.8 | 119.7 |

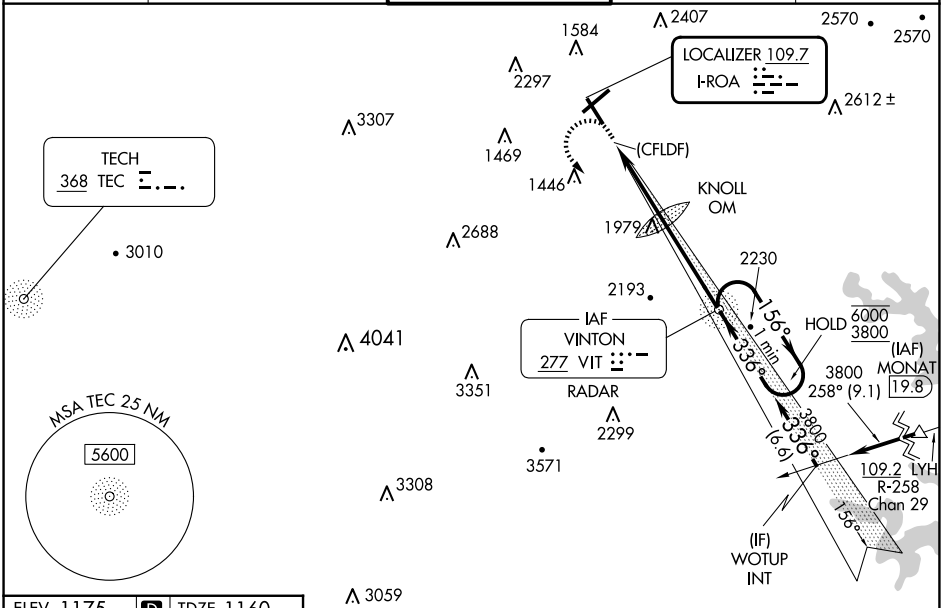


Procedure NA for arrivals at MONAT on V470 northeast bound.

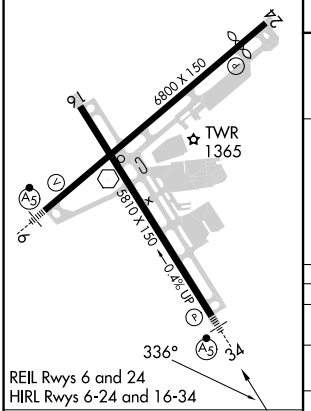


FAF to MAP 7.1 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 7:06 | 4:44 | 3:33 | 2:50 | 2:22 |

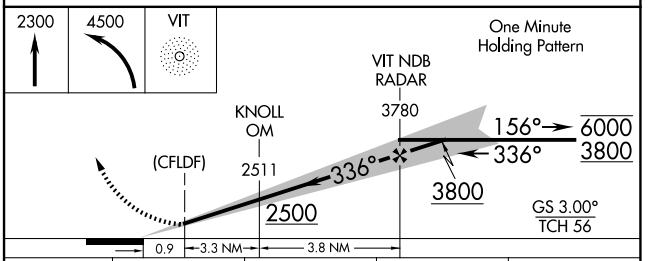


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 34 # | 1603-⅞ | 443 (500-⅞) | | |
| S-ILS 34 | 2040-4 | 880 (900-4) | | |
| S-LOC 34 | 2140-¾ 980 (1000-¾) | 2140-1 980 (1000-1) | 2140-2½ | 980 (1000-2½) |
| CIRCLING | 2140-1¼ 965 (1000-1¼) | 2140-1½ 965 (1000-1½) | 2460-3 1285 (1300-3) | 2800-3 1625 (1700-3) |



NE-3, 10 JUL 2025 to 07 AUG 2025
NE-3, 10 JUL 2025 to 07 AUG 2025