

WAAS CH <b>50202</b> <b>W03A</b>	APP CRS <b>035°</b>	Rwy Idg <b>13000</b> TDZE <b>3667</b> Apt Elev <b>3671</b>
--	------------------------	--

RNAV (GPS) RWY 3

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼


▲

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, Use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ⅓ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅔ SM, Cat D ⅓ SM and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS <b>128.45 306.2</b>	ROSWELL APP CON ★ <b>119.6 239.0</b>	ROSWELL TOWER ★ <b>118.5 (CTAF) 0 233.7</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>132.875 282.25</b>	UNICOM <b>122.95</b>
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

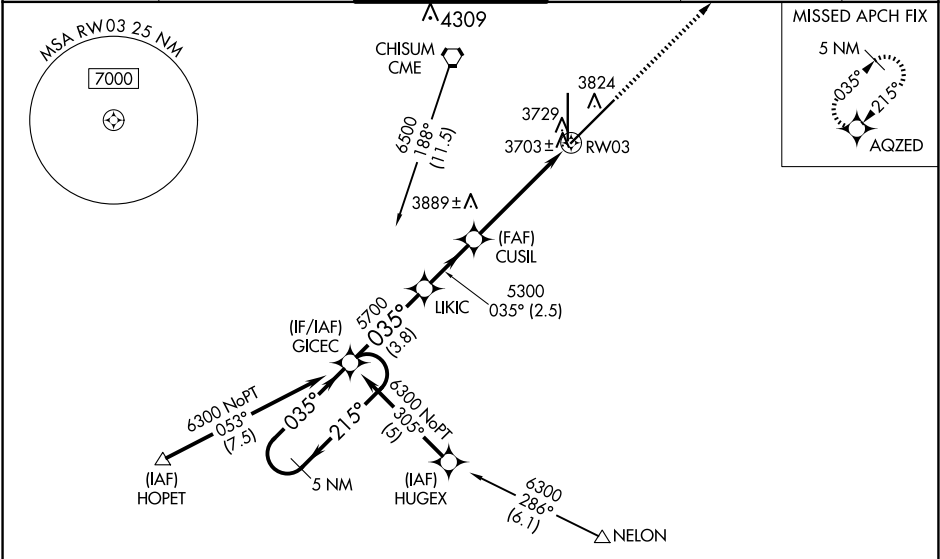

ELEV 3671		D TDZE 3667	
5 NM Holding Pattern		6000 AQZED	
GP 3.00° TCH 50		1.3 NM to RW03	
3.8 NM		2.5 NM	
3.6 NM		1.3 NM	
CATEGORY	A	B	C
LPV DA	3917-¾		250 (300-¾)
LNAV/VNAV DA	3987-1		320 (400-1)
LNAV MDA	4140-1	473 (500-1)	4140-1½
CIRCLING	4140-1	469 (500-1)	4300-2