
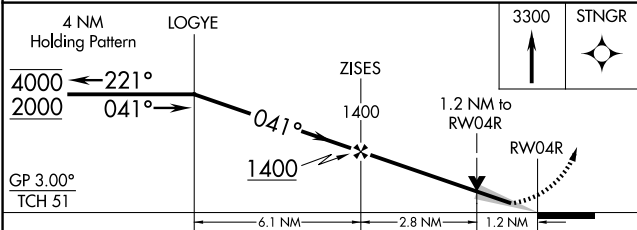


| | | |
|--|------------------------|--|
| WAAS CH 45601 W04A | APP CRS 041° | Rwy Ldg 11301 TDZE 81 Apt Elev 98 |
|--|------------------------|--|

RNAV (GPS) RWY 4R
SACRAMENTO MATHER (MHR)

| | |
|---|--|
| RNP APCH - GPS. | MISSED APPROACH: Climb to 3300 direct STNGR and hold. *Missed approach requires minimum climb of 210 feet per NM to 2500. |
| ▼ Circling NA northwest of Rwy 4R-22L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. | |

| | | | | | |
|------------------------|--------------------------------------|---|--------------------------------|---------------------------------|-------------------------|
| ATIS 118.325 | NORCAL APP CON 127.4 317.5 | MATHER TOWER ★ 120.65 (CTAF) 0 282.25 | GND CON 121.85 307.9 | CLNC DEL 121.85 307.9 | UNICOM 122.95 |
|------------------------|--------------------------------------|---|--------------------------------|---------------------------------|-------------------------|

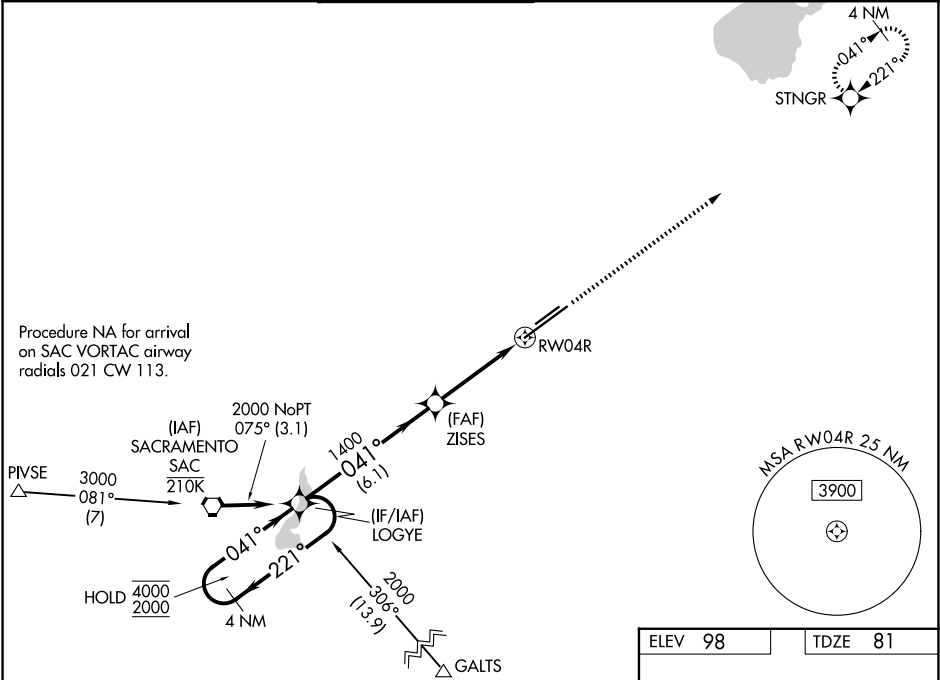

| CATEGORY | A | B | C | D |
|---------------|-----------------------|-----------------------|------------------------|----------------------|
| LPV DA* | | 331/40 | 250 (300-¾) | |
| LNAV/VNAV DA* | | 365/45 | 284 (300-⅞) | |
| LNAV MDA* | 520/55 | 439 (500-1) | 520-1¼ | 439 (500-1¼) |
| LNAV MDA | 540/55 459 (500-1) | 560/55 479 (500-1) | 580-1⅓ | 499 (500-1⅓) |
| CIRCLING | 560-1 462 (500-1) | 580-1 482 (500-1) | 600-1½ 502 (600-1½) | 740-2 642 (700-2) |

