
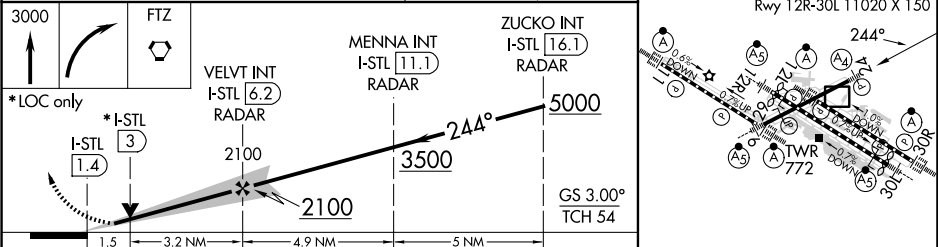
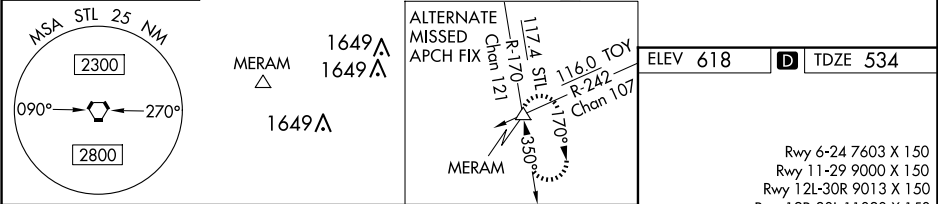
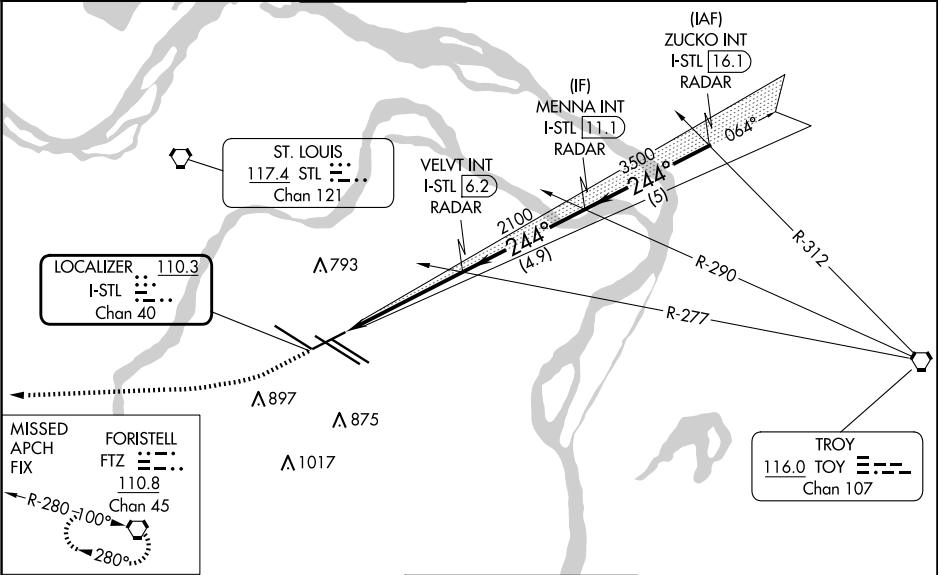


LOC/DME I-STL	APP CRS	Rwy Idg TDZE	7603
<b>110.3</b>	<b>244°</b>	<b>534</b>	
Chan 40		Apt Elev	618

ILS or LOC RWY 24

ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.				MAL S 	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.
▼ Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1½ SM.					
D-ATIS <b>125.025</b> <b>379.925</b>	ST. LOUIS APP CON <b>132.125 360.6</b>	ST. LOUIS TOWER <b>120.05 284.6</b>	GND CON <b>121.9 348.6</b> (Inbound) <b>121.65 377.175</b> (Outbound) <b>118.925 227.125</b> (Rwy 11/29)	CLNC DEL <b>119.5 363.1</b>	CPDLC



CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40	546 (500-¾)	1080-1¾	546 (500-1¾)	

HIRL all Rwy	TDZ/CL Rwy	11, 12L, 12R, 29, and 30R
FAF to MAP 4.8 NM		
Knots	60	90 120 150 180
Min:Sec	4:48	3:12 2:24 1:55 1:36