FAIRFIELD NINE DEPARTURE

AL-365 (FAA)

D-ATIS
124.75 125.625
CLNC DEL
127.3 379.975
CPDLC
SALT LAKE CITY DEP CON
128.6 322.3

TOP ALTITUDE: 10000

TAKEOFF MINIMUMS
Rwys 14, 32, 34L/R, 35: NA- ATC.
Rwys 16L/R, 17: Assigned heading 160°, standard with minimum climb of 260′ per NM to 6000; assigned heading 280° CW 340°, standard with minimum climb of 400′ per NM to 8300.

NOTE: DME required.
NOTE: RADAR required.
NOTE: This is a RADAR vector departure to assigned route or fix.

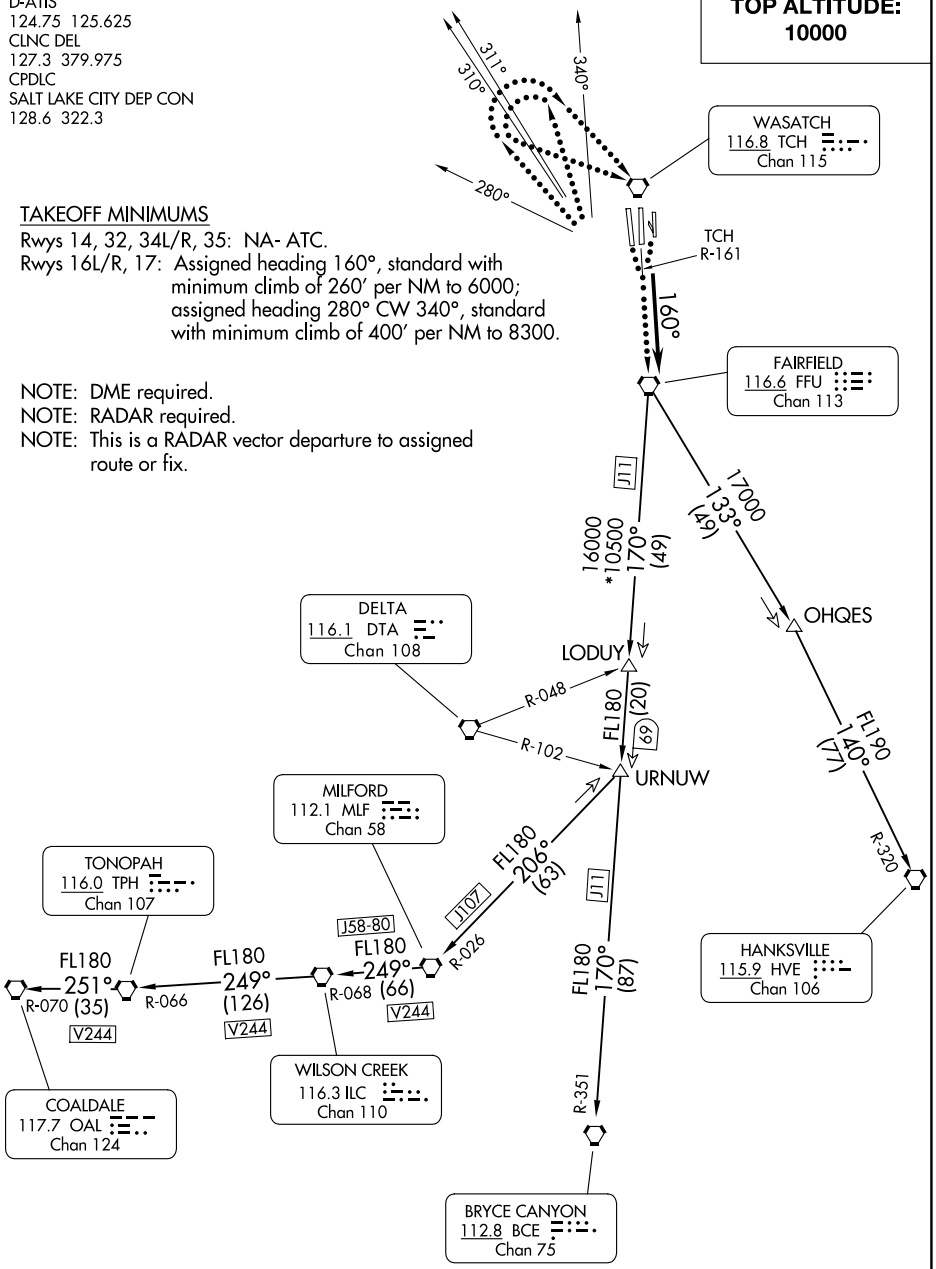

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.