

APP CRS

308°

Rwy Ldg

8502

TDZE

790


Apt Elev

809

RNAV (RNP) Z RWY 31L

SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS			MALSR	MISSED APPROACH: Climb to 4200 direct HASDO and track 307° to REUBE and hold.	
For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.					
D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

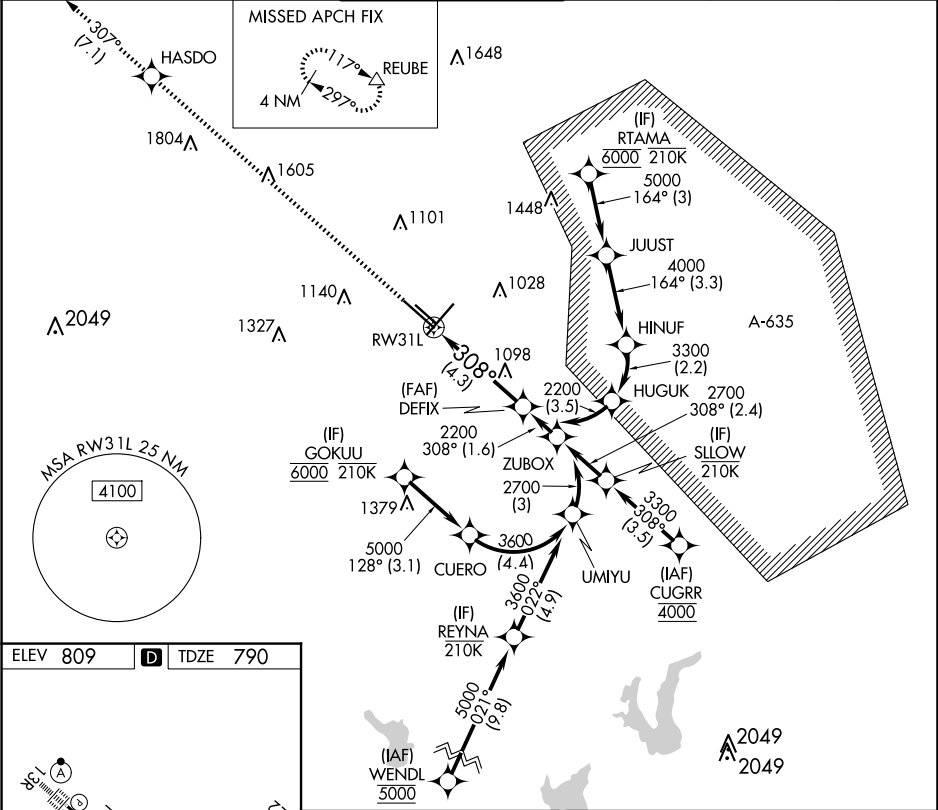

ELEV 809

D

TDZE 790

TDZ/CL Rwy 13R

REIL Rwy 13L, 22 and 13R-31R

HIRL Rwy 4-22 and 13R-31L

MIRL Rwy 13L-31R

4200

HASDO

tr 307°

REUBE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 82).

See planview for multiple IF locations.

RW31L

DEFIX

2200

GP 3.00°

TCH 60

CATEGORY	A	B	C	D
RNP 0.15 DA		1144/30	354 (400-%)	
RNP 0.30 DA		1200/40	410 (400-¾)	

AUTHORIZATION REQUIRED