| WAAS | APP CRS | Rwy Idg | 5700 |
|---|---|---|---|
| CH 99502 | 196° | TDZE | 54 |
| W20A | | Apt Elev | 56 |

# RNAV (GPS) Y RWY 20R

## JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1⅜ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct MINOE.

| D-ATIS | SOCAL APP CON | JOHN WAYNE TOWER ★ | GND CON | CLNC DEL | CPDLC | UNICOM |
|---|---|---|---|---|---|---|
| 126.0 | 121.3 263.1 | 126.8 (CTAF) L 343.625 | 120.8 | 118.0 | | 122.95 |

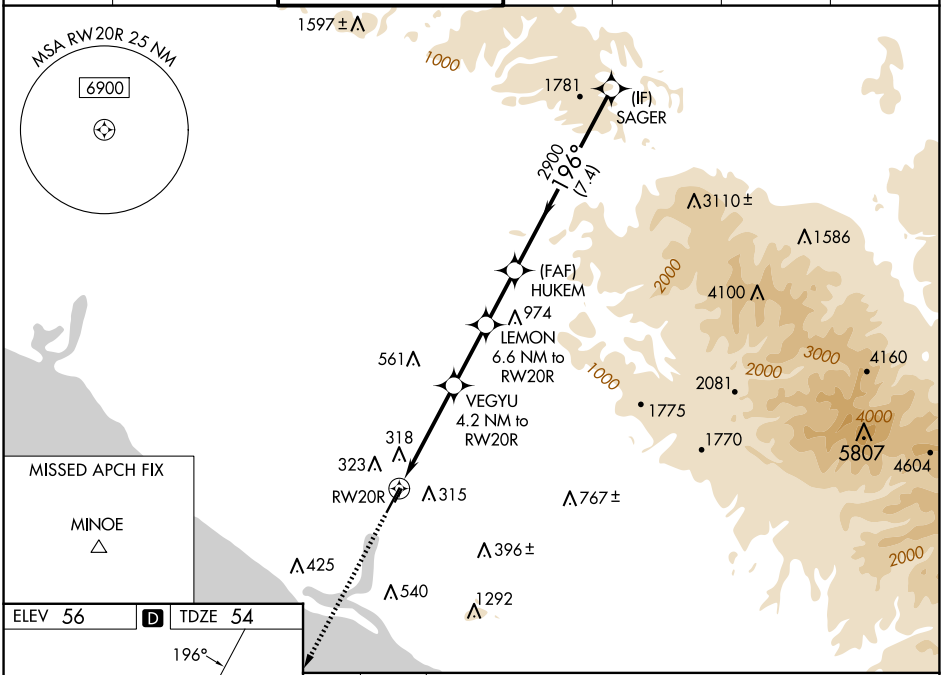


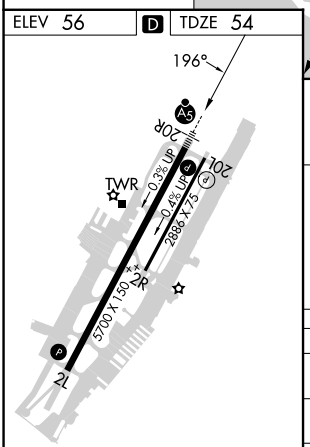


REIL Rwy 20L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R

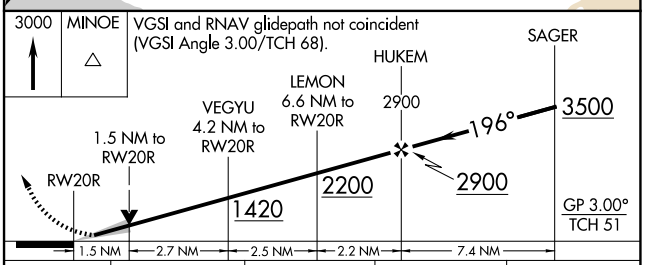


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA* | 255/24 201 (200-½) | | | |
| LNAV/VNAV DA | 516/50 462 (500-1) | | | |
| LNAV MDA | 580/24 526 (600-½) | | 580/55 526 (600-1) | |
| C CIRCLING | 640-1 584 (600-1) | | 840-2¼ 784 (800-2¼) | 1180-3 1124 (1200-3) |



SW-3, 10 JUL 2025 to 07 AUG 2025
SW-3, 10 JUL 2025 to 07 AUG 2025