

WAAS CH <b>9011A</b> <b>W10A</b>	APP CRS <b>097°</b>	Rwy Idg TDZE <b>30</b> Apt Elev <b>50</b>	<b>9351</b>
--	------------------------	---	-------------

RNAV (GPS) RWY 10

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH-GPS

▼



▲

For inop ALS increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase LPV DA to 296 feet and all visibilities to RVR 2000, increase LNAV/VNAV DA to 596 feet and all visibilities to 1¼ SM, increase all MDAs 80 feet and LNAV Cat C/D visibility to RVR 5000. For inop ALS when using Hilton Head Island altimeter setting, LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D visibility to 1½ SM. VDP and Baro-VNAV NA when using Hilton Head Island altimeter setting.

MALSR

MISSED APPROACH:  
Climb to 2500 direct  
TELOE and hold.

ATIS <b>123.75</b>	SAVANNAH APP CON★ <b>125.3 371.875</b>	SAVANNAH TOWER★ <b>125.975 (CTAF) 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>119.55 291.775</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------------	-----------------------------------	-------------------------

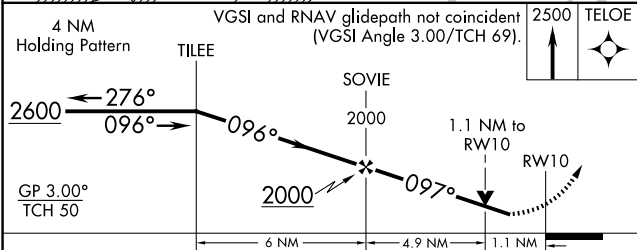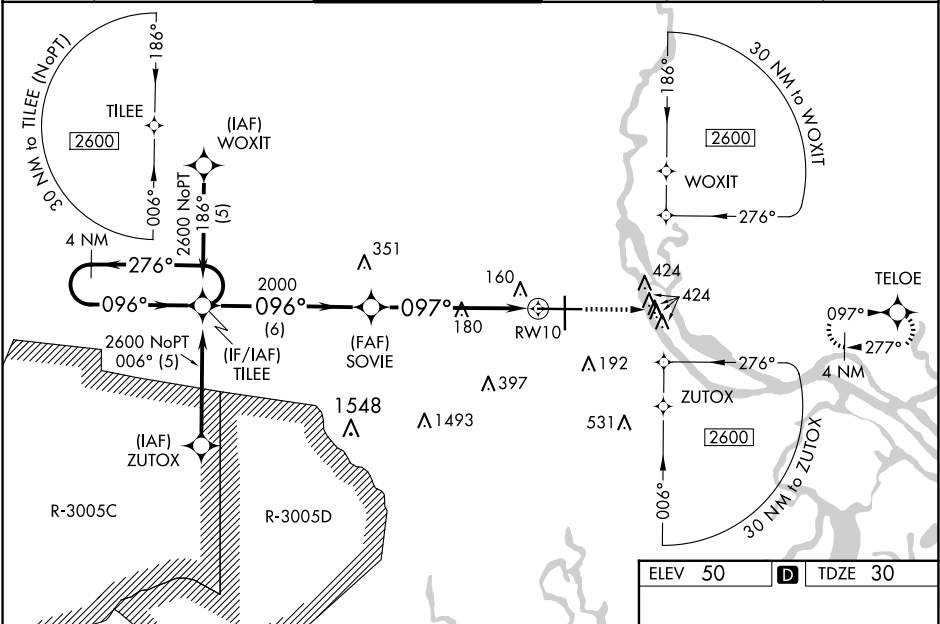

CATEGORY	A	B	C	D
LPV DA	230/18 200 (200-½)			
LNAV/VNAV DA	530/50 500 (500-1)			
LNAV MDA	440/24	410 (400-½)	440/40	410 (400-¾)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)

