

WAAS
CH **82125**
W22A

APP CRS
224°

Rwy Idg
TDZE
274
Apt Elev
279

RNAV (GPS) RWY 22

WALNUT RIDGE RGNL (ARG)


▼

⚠

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase LPV and LNAV/VNAV DA to 578 feet, and all MDAs 60 feet; increase LNAV Cats C/D visibility ½ SM and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct
XIHAM and hold.

AWOS-3PT 126.525	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

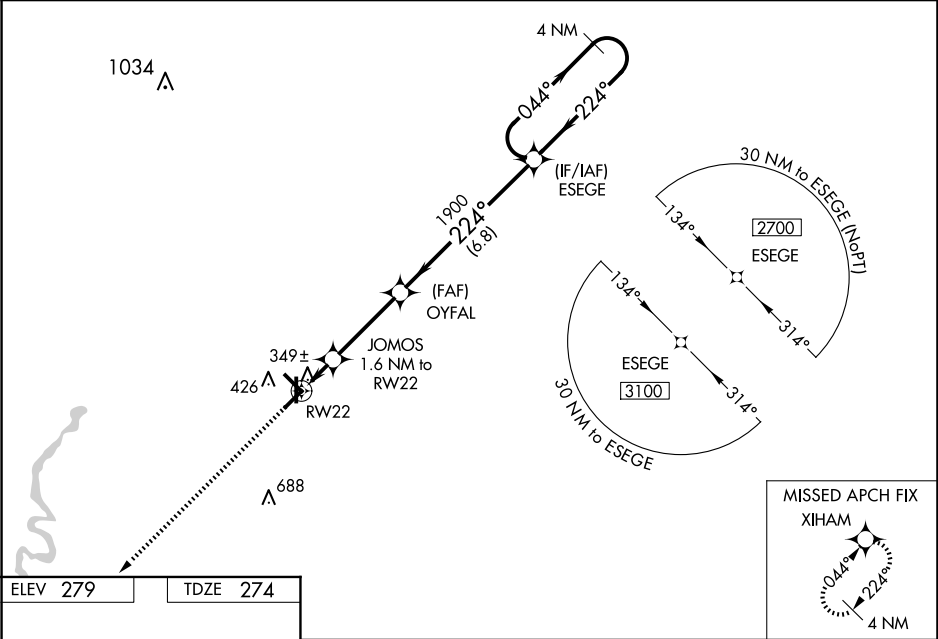

ELEV 279

TDZE 274

37

81

5003 X 150

5001 X 100

5001 X 150

6001 X 150

338

36

REIL Rwy 18 0

MIRL Rwy 4-22, 18-36 0

2700 XIHAM

*LNAV only.

JOMOS 1.6 NM to RW22

*0.9 NM to RW22

RW22

0.9 NM

0.7 NM

3.4 NM

OYFAL 1900

ESEGE

4 NM Holding Pattern

044°

224°

2700

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA	524-1 250 (300-1)			
LNAV/VNAV DA	524-1 250 (300-1)			
LNAV MDA	600-1 326 (400-1)			
CIRCLING	760-1 481 (500-1)		800-1½ 521 (600-1½)	1000-2¼ 721 (800-2¼)