VOR RWY 21R
TRI-CITIES (PSC)

VOR/DME PSC	APP CRS	Rwy Idg	7110
113.75	217°	TDZE	404
Chan 84 (Y)		Apt Elev	410

DME required.

T A VDP NA when using Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all MDA 100 feet and increase S-21R Cat C/D visibility ⅜ SM and Circling Cat C/D visibility ¼ SM. For inop ALS when using Hermiston altimeter setting, increase Cat C/D visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climbing left turn to 3200 on heading 080° and PSC VOR/DME R-092 PSC VOR/DME to CITYS INT/PSC 14 DME and hold.

ATIS	SPOKANE APP CON ★	TRI-CITIES TOWER ★	GND CON	CLNC DEL	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 323.3	121.8	120.0	122.95

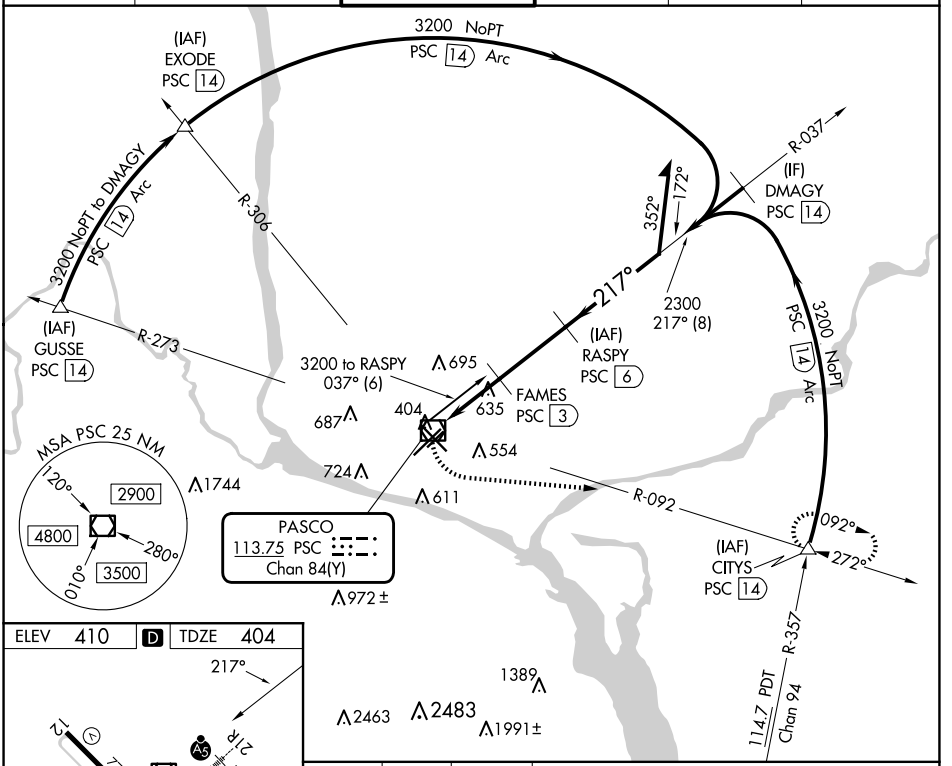

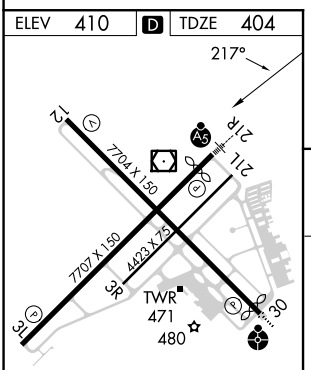

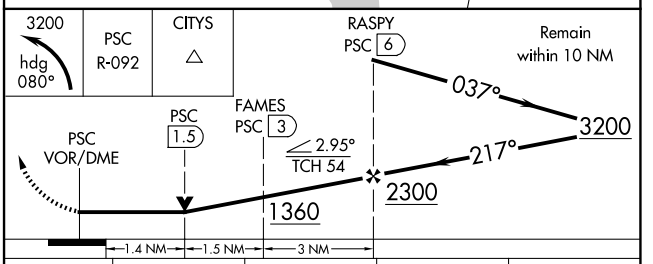

CATEGORY	A	B	C	D
S-21R	940/24	536 (600-½)	940/55	536 (600-1)
C CIRCLING	940-1	530 (600-1)	1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 10 JUL 2025 to 07 AUG 2025
NW-1, 10 JUL 2025 to 07 AUG 2025