


ROANOKE DEP CON
135.0 254.325
ATIS 119.8
GND CON
121.9
LYNCHBURG TOWER ★
127.65 (CTAF) 257.8

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.
RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE:
4000

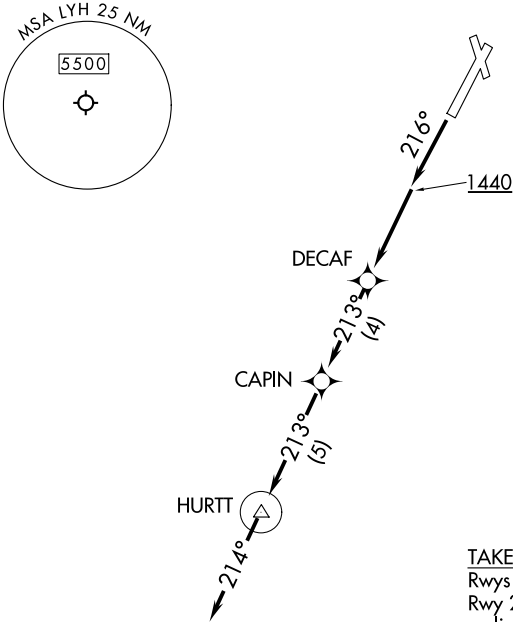

TAKEOFF MINIMUMS:
Rwys 4, 17, 35: NA-ATC.
Rwy 22: Standard with minimum
climb of 500' per NM to 1440.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 22: Climb on heading 216° to 1440, then direct DECAF, then on depicted route to HURTT, then on heading 214° for RADAR vectors. Maintain 4000, expect filed altitude within 10 minutes after departure.