

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>77832</b><br><b>W17A</b> | APP CRS<br><b>171°</b> | Rwy Idg <b>5214</b><br>TDZE <b>595</b><br>Apt Elev <b>595</b> |
|--|------------------------|---|




RNAV (GPS) RWY 17  
SAN MARCOS RGNL (HYI)

**T** Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and Circling Cat C/D visibility  $\frac{1}{4}$  mile; increase LNAV/VNAV all Cats and LNAV Cat C/D/E visibility  $\frac{1}{8}$  mile. Circling NA for Cat E SW of Rwy 13-31.

**A** DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below  $\frac{3}{4}$  SM NA.

**MISSED APPROACH.**  
Climb to 3100 direct  
C/LAK and hold.

|                        |                                       |   |                           |                            |  |
|------------------------|---------------------------------------|---|---------------------------|----------------------------|--|
| ATIS<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER★<br><b>126.825</b> (CTAF) <b>0</b> | GND CON<br><b>120.125</b> | CLNC DEL<br><b>120.125</b> | CLNC DEL<br><b>121.35</b><br>(when twr closed) |
|------------------------|---------------------------------------|---|---------------------------|----------------------------|--|

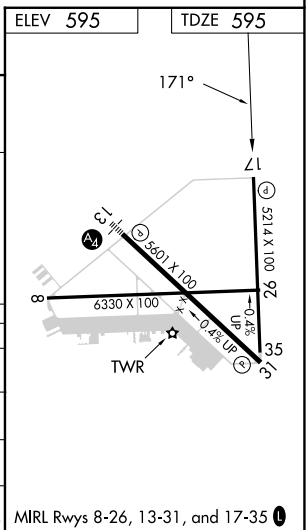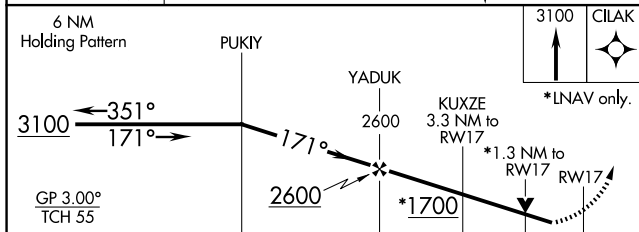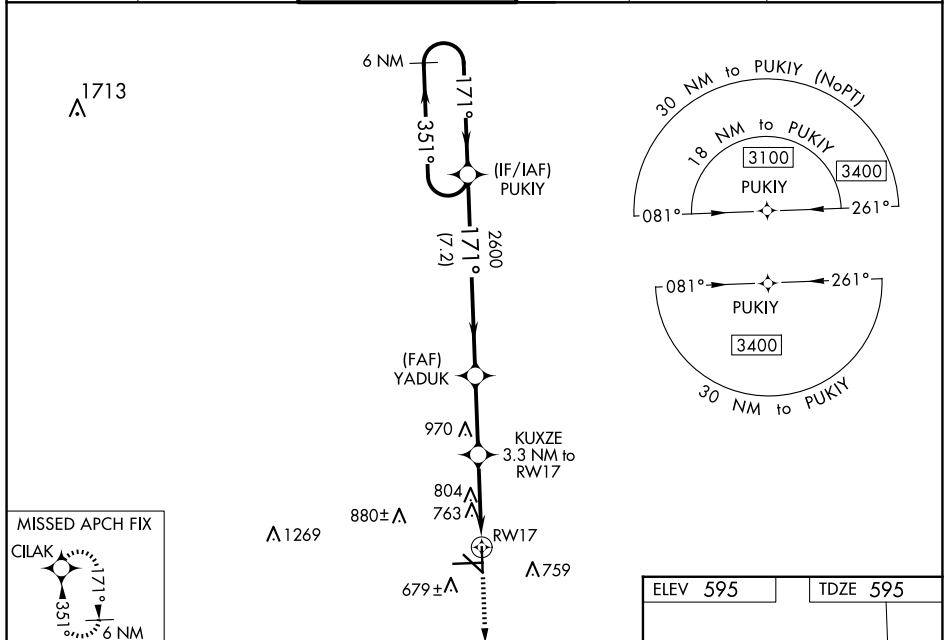

|                   |     |                       |                       |  |  |  |  |        |  |   |  |
|-------------------|-----|-----------------------|-----------------------|--|--|--|--|--------|--|---|--|
|                   |     | 7.2 NM                |                       | 2.8 NM   |  | 2 NM   |  | 1.3 NM |  |   |  |
| CATEGORY          |     | A                     |                       | B  |  | C  |  | D      |  | E |  |
| LPV               | DA  | 960-1 $\frac{1}{8}$   |                       | 365 (400-1 $\frac{1}{8}$ )                         |  |  |  |        |  |   |  |
| RNAV/<br>VNAV     | DA  | 1052-1 $\frac{1}{2}$  |                       | 457 (500-1 $\frac{1}{2}$ )                         |  |  |  |        |  |   |  |
| RNAV              | MDA | 1060-1 465 (500-1)    |                       | 1060-1 $\frac{3}{8}$ 465 (500-1 $\frac{3}{8}$ )    |  |  |  |        |  |   |  |
| <b>C</b> CIRCLING |     | 1080-1<br>485 (500-1) | 1120-1<br>525 (600-1) | 1240-1 $\frac{3}{4}$<br>645 (700-1 $\frac{3}{4}$ ) | 1320-2 $\frac{1}{4}$<br>725 (800-2 $\frac{1}{4}$ ) | 1340-2 $\frac{3}{4}$<br>745 (800-2 $\frac{3}{4}$ ) |  |        |  |   |  |