



LOC I-SPI	APP CRS	Rwy Idg	7927
109.5	043°	TDZE	592
		Apt Elev	598

ILS or LOC RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.				MALSR		MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.	
When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1¾ SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).							
ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★		GND CON	CLNC DEL	UNICOM	
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8		121.9 348.6	121.7	122.95	

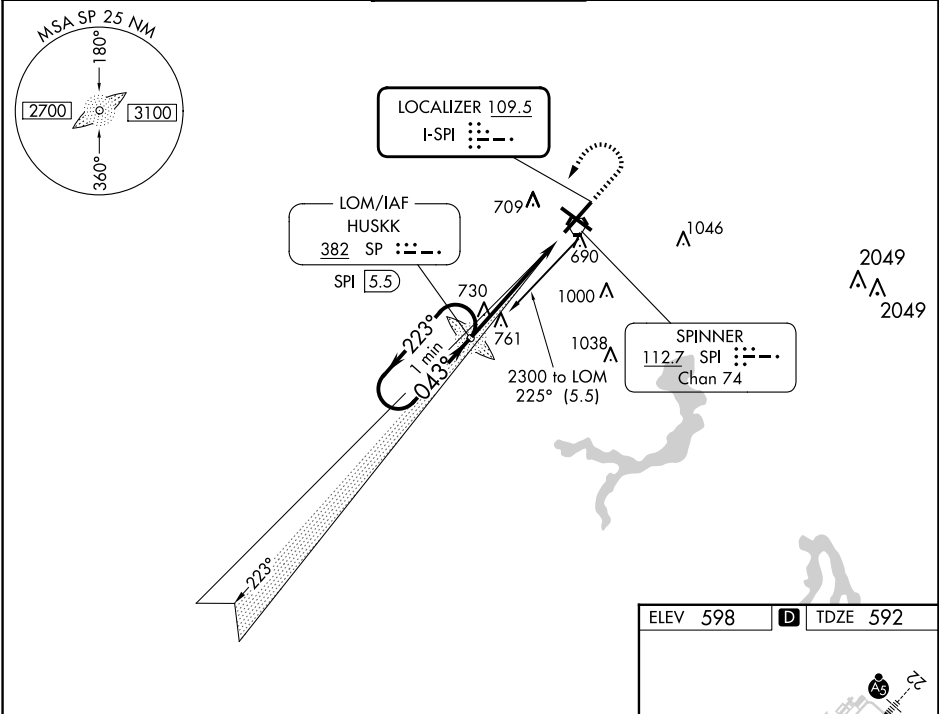

One Minute Holding Pattern		SP LOM SPI 5.5	1500	2300	SP
		2297			
GS 3.00° TCH 56		2300	2300	223°	043°
		5.1 NM			
CATEGORY	A	B	C	D	
S-ILS 4	* 792/24 200 (200-½)				
S-LOC 4	1020/24	428 (500-½)	1020/40	428 (500-¾)	
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	

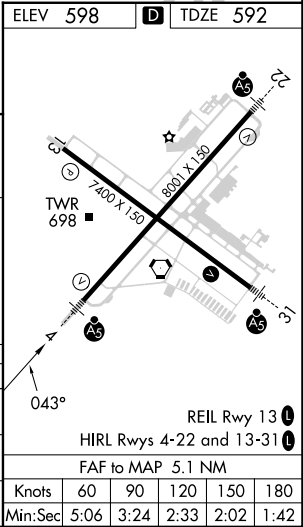

EC-3, 10 JUL 2025 to 07 AUG 2025

EC-3, 10 JUL 2025 to 07 AUG 2025