RNAV (GPS) RWY 12

TRI-STATE/MILTON J FERGUSON FLD (HTS)

WAAS	APP CRS	Rwy Ldg	6516
CH 45699	118°	TDZE	828
W12A		Apt Elev	828

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1700 then climbing left turn to 4000 direct CROUP and hold, continue to climb-in-hold to 4000.

ATIS	HUNTINGTON APP CON	HUNTINGTON TOWER	GND CON	CLNC DEL
125.2	119.75 270.1	118.5 270.1	121.9	118.05

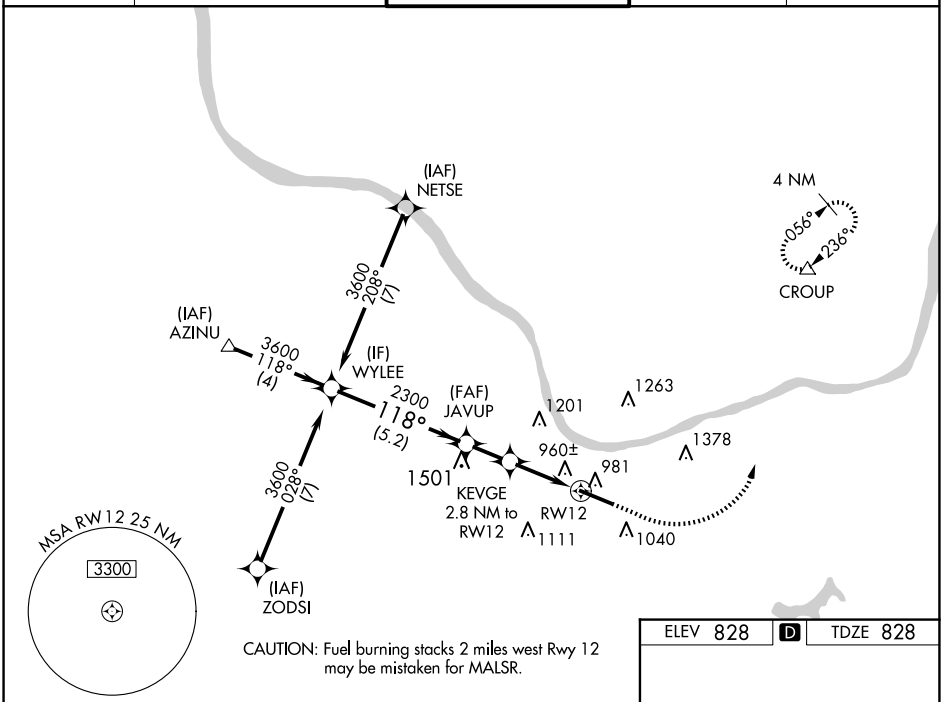

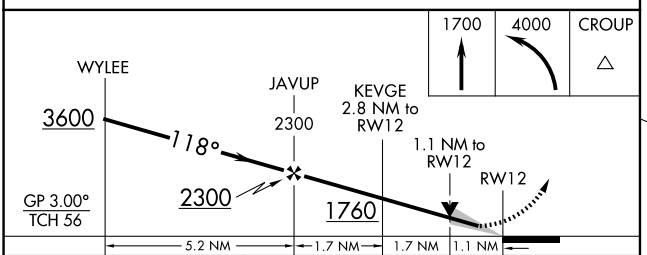



CATEGORY	A	B	C	D
LPV DA *		1028/24	200 (200-½)	
LNAV/VNAV DA		1121/24	293 (300-½)	
LNAV MDA	1220/24	392 (400-½)	1220/35	392 (400-⅝)
CIRCLING	1300-1 472 (500-1)	1380-1 552 (600-1)	1520-2 692 (700-2)	1740-3 912 (1000-3)

REIL Rwy 30
HIRL Rwy 12-30

NE-4, 10 JUL 2025 to 07 AUG 2025
NE-4, 10 JUL 2025 to 07 AUG 2025