


D-ATIS  
124.4  
CLNC DEL  
125.5 263.0  
CPDLC  
GND CON  
121.9 348.6  
AUSTIN TOWER  
121.0 281.5  
AUSTIN DEP CON  
119.0 370.85

TOP ALTITUDE:  
ASSIGNED BY ATC

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.

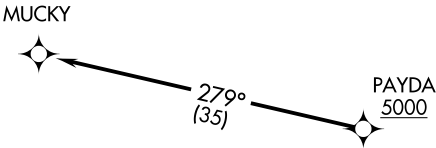

TAKEOFF MINIMUMS  
Rwys 18L/R: Standard.  
Rwys 36L/R: Standard with minimum climb  
of 240' per NM to 2600.

NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RUNWAYS 18L/R:** Climb on heading 175° or as assigned by ATC for vectors to cross PAYDA at or above 5000, thence. . . .

**TAKEOFF RUNWAYS 36L/R:** Climb on heading 355° or as assigned by ATC for vectors to cross PAYDA at or above 5000, thence. . . .

. . . on track 279° to MUCKY. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.