RNAV (RNP) Z RWY 10R

PITTSBURGH INTL (PIT)

APP CRS	Rwy Ldg	11492
101°	TDZE	1135
	Apt Elev	1203

RNP AR APCH - GPS. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C. For inop ALS, increase RNP 0.14 all Cats visibility to RVR 5500, and RNP 0.30 all Cats visibility to 1⅝ SM. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 4000 on track 101° to KADEC and on track 143° to JAPAV and on track 198° to GUZIT and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR 127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6	126.75 353.7
DEP 135.9			NORTH 127.8 348.6	

CPDLC

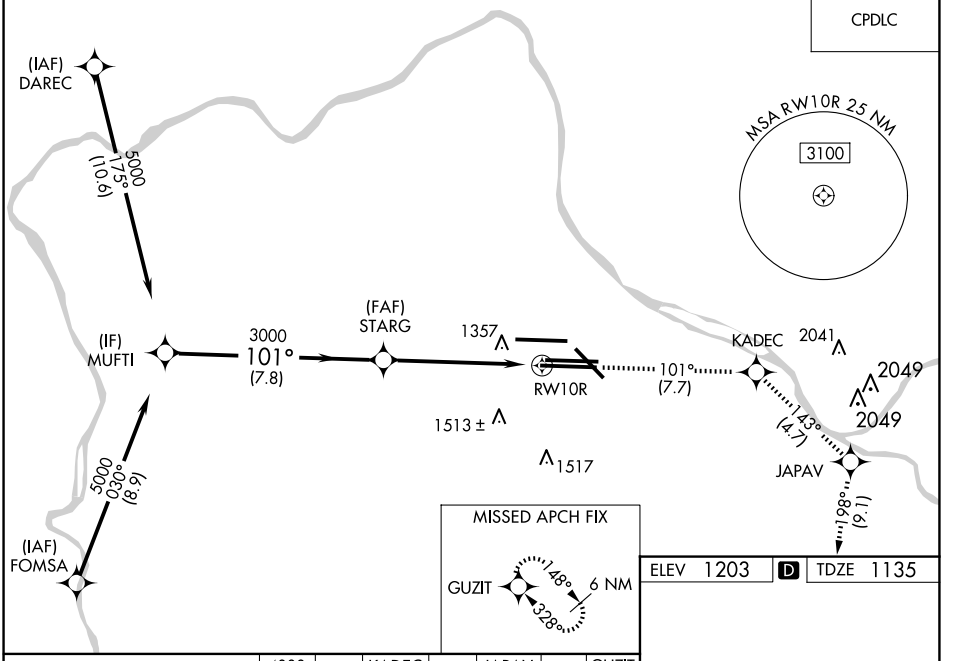

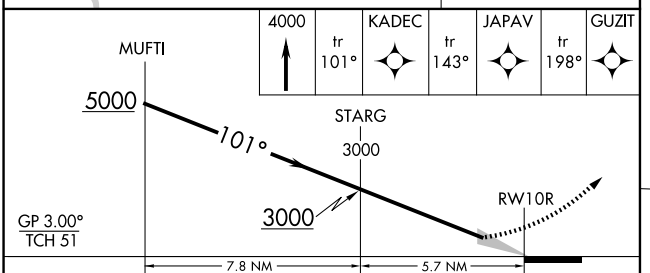

CATEGORY	A	B	C	D
RNP 0.14 DA		1511/35	376 (400-⅝)	
RNP 0.20 DA		1572/40	437 (400-¾)	
RNP 0.30 DA		1697-1¼	562 (500-1¼)	

AUTHORIZATION REQUIRED

ELEV 1203 D TDZE 1135



REIL Rwy 10C
HIRL all Rwys
TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32

NE-4, 10 JUL 2025 to 07 AUG 2025
NE-4, 10 JUL 2025 to 07 AUG 2025