RNAV (RNP) Z RWY 31L

JOHN F KENNEDY INTL (JFK)

APP CRS	Rwy Idg	11247
314°	TDZE	13
	Apt Elev	13

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct FRNKY and on track 202° to CHANT and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON		KENNEDY TOWER			GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R	119.1	281.55	121.9	135.05	
					Rwys 4L/22R and 13R/31L	123.9	281.55	348.6	348.6	

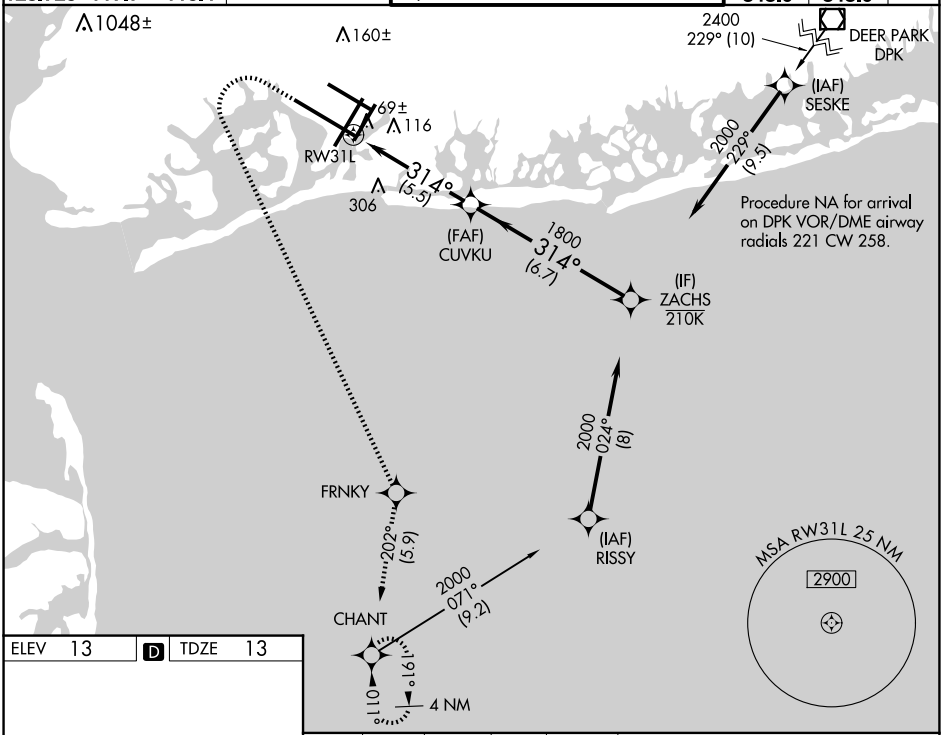

ELEV 13	D	TDZE 13



RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

500	3000	FRNKY	tr 202°	CHANT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

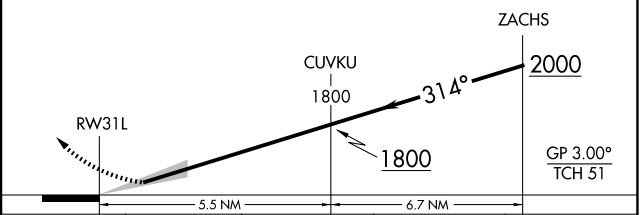

CATEGORY	A	B	C	D
RNP 0.30 DA	410-1⅜ 397 (400-1⅜)			

AUTHORIZATION REQUIRED

NE-2, 10 JUL 2025 to 07 AUG 2025
NE-2, 10 JUL 2025 to 07 AUG 2025