


D-ATIS
128.725
CLNC DEL
135.05 348.6
CPDLC
NEW YORK DEP CON
135.9 353.75

RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.

TAKEOFF MINIMUMS:
Rwys 4L/R, 13L/R, 22L/R: NA - Noise Abatement.
Rwy 31R: Standard with minimum climb of 500' per NM to 3000.
Rwy 31L: Standard with minimum climb of 500' per NM to 3000.

NOTE: Departing Rwy 31L requires expeditious intercept of outbound course 238° to SKORR.

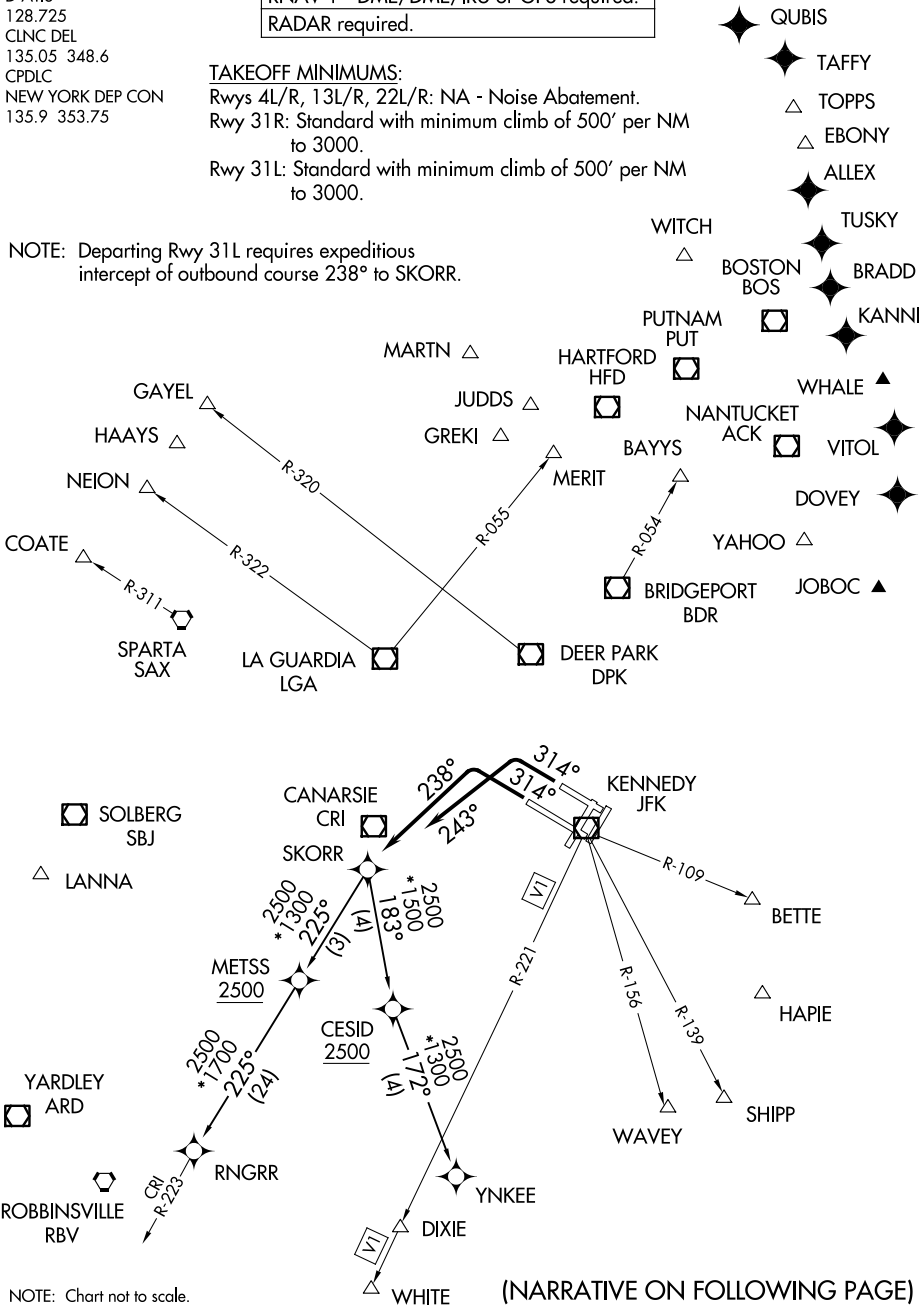

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)