

WAAS CH 40014 W04A	APP CRS 042°	Rwy Idg TDZE 542 Apt Elev 544	7734
--	------------------------	---	-------------

RNAV (GPS) RWY 4
TYLER POUNDS RGNL (TYR)

RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 ½ SM, LNAV all Cats visibility to 1 SM.

MALSR




MISSED APPROACH: Climb to 1100 then climbing right turn to 2500 direct OTTIF and hold.

ATIS 126.25	LONGVIEW APP CON ★ 128.75 379.15	POUNDS TOWER ★ 120.1 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

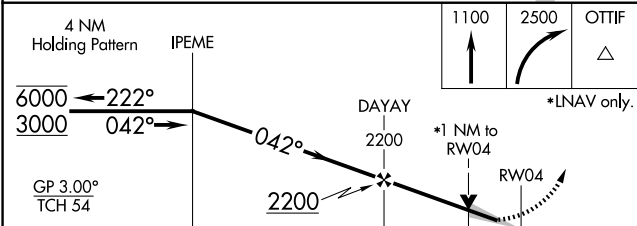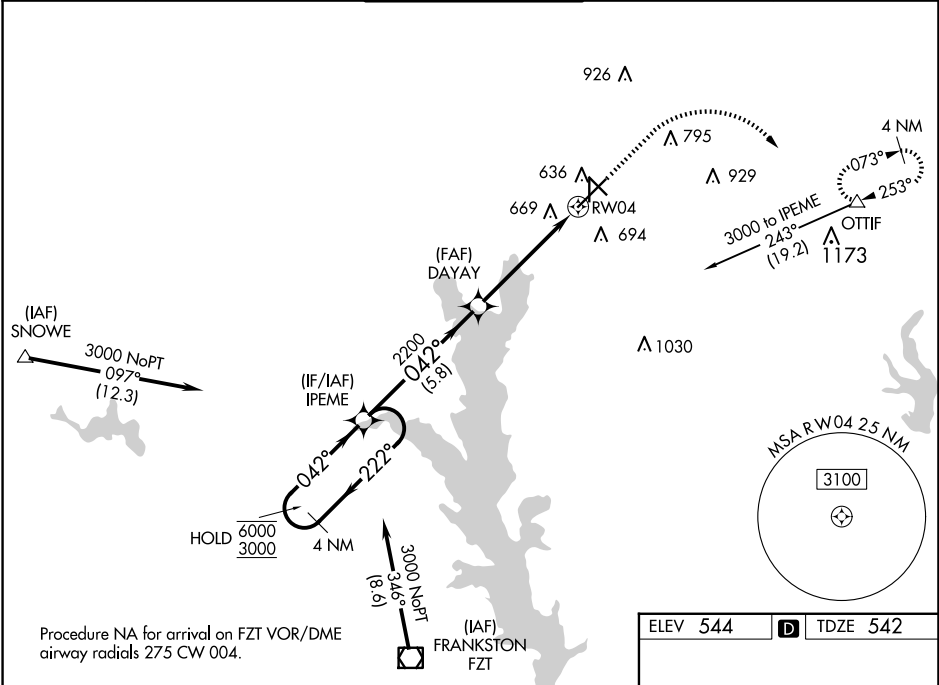

CATEGORY	A	B	C	D
LPV DA		742-½	200 (200-½)	
LNAV/VNAV DA		943-¾	401 (400-¾)	
LNAV MDA	920-½ 378 (400-½)		920-⅝ 378 (400-⅝)	
CIRCLING	980-1 436 (500-1)	1020-1 476 (500-1)	1160-1¾ 616 (700-1¾)	1280-2¼ 736 (800-2¼)

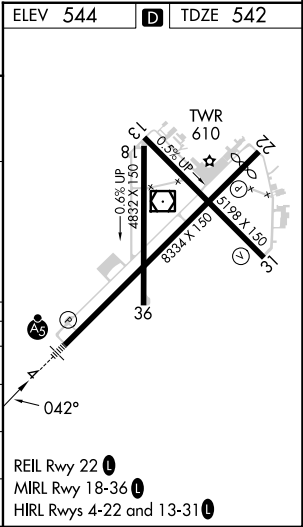

SC-2, 10 JUL 2025 to 07 AUG 2025

SC-2, 10 JUL 2025 to 07 AUG 2025