


WAAS CH 87000 W11A	APP CRS 113°	Rwy Ldg TDZE 132 Apt Elev 132
--	------------------------	---

RNAV (GPS) Z RWY 11

LAURENCE G HANSCOM FLD (BED)

RNP APCH-GPS. <div><div>▼</div><div>▲</div></div> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C or above 54° C. For inop ALS, increase all LNAV/VNAV Cats visibility to RVR 5500.			MALS R 	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct ZIMOT and hold.	
ATIS 124.6	BOSTON APP CON 124.4 279.6	HANSCOM TOWER ★ 118.5 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 121.85	UNICOM 122.95

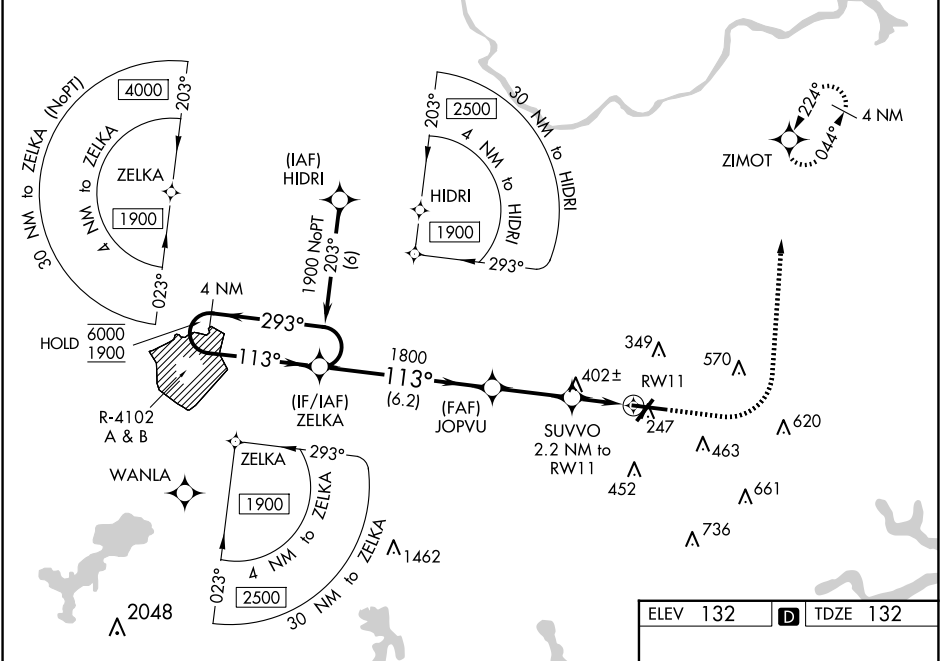

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67').					1000	2000	ZIMOT
4 NM Holding Pattern							
ZELKA							
JOPVU							
SUVVO 2.2 NM to RW11							
GP 3.00° TCH 50							
CATEGORY	A	B	C	D			
LPV DA	384/24		252 (300-½)				
LNAV/VNAV DA	474/30		342 (400-¾)				
LNAV MDA	660/24 528 (600-½)		660/55 528 (600-1)				
CIRCLING	720-1 588 (600-1)		880-2¼ 748 (800-2¼)				