

LOC/DME I-CVG	APP CRS	Rwy Ldg	11000
<b>109.9</b>	<b>006°</b>	TDZE	<b>850</b>
Chan <b>36</b>		Apt Elev	<b>896</b>

ILS or LOC RWY 36C

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP APCH - GPS.



MISSED APPROACH: Climb to 4000 direct DULEY and hold, continue climb-in-hold to 4000.



For inop ALS, increase S-LOC 36C Cats C and D visibility to 6000 RVR. Simultaneous approach authorized.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL	CPDLC
ARR <b>134.375</b> DEP <b>135.3</b>	<b>119.7 363.15</b> (090°-269°) <b>123.875 363.15</b> (270°-089°)	<b>118.975 360.85</b> (Rwy 18L/36R) <b>118.3</b> (Rwys 18C/36C, 9/27) <b>133.325</b> (Rwy 18R/36L)	<b>121.7</b>	<b>127.175</b>	

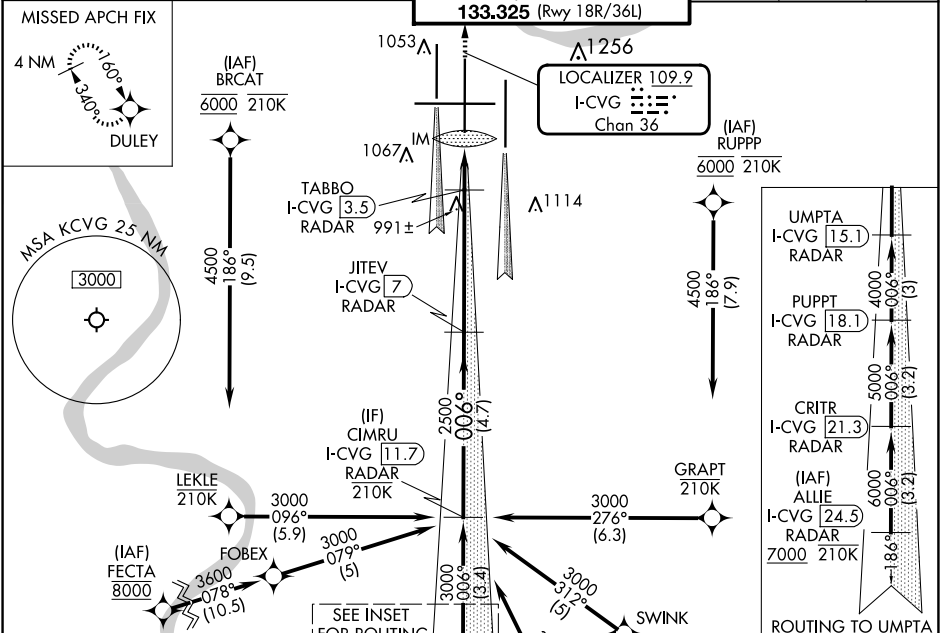

ELEV 896	TDZE 850
----------	----------

TDZ/CL all Rwy's except 27  
HIRL all Rwy's

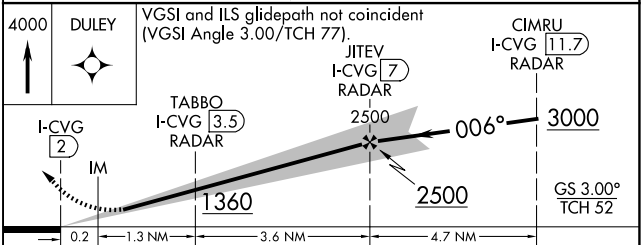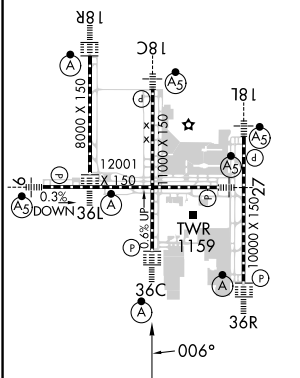

CATEGORY	A	B	C	D
S-ILS 36C	1050/18 200 (200-½)			
S-LOC 36C	1260/24	410 (400-½)	1260/40	410 (400-¾)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)