WAAS	APP CRS	Rwy Ldg	5425
CH 77812	246°	TDZE	43
W24A		Apt Elev	54

RNAV (GPS) RWY 24
CAPE COD GATEWAY (HYA)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 24 helicopter visibility reduction below RVR 5000 NA. When local altimeter setting not received, use Chatham altimeter setting; increase LPV DA to 350 feet; increase LNAV/VNAV DA to 473 feet; increase all MDAs 40 feet, LNAV visibility Cats C and D to RVR 6000, and Circling visibility Cats C/D ¼SM. Baro-VNAV NA when using Chatham Muni altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cat C/D visibility to 1⅜ SM. Inop table does not apply to LPV all Cats, and LNAV Cats A and B. Straight in/Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For inop ALS when using Chatham altimeter setting, increase LNAV/VNAV visibility all Cats to 1¼ SM.

MALSF

MISSED APPROACH: Climb to 2000 direct FIXUG and hold.

ATIS	BOSTON APP CON	HYANNIS TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
123.8	118.2 284.6	119.5 (CTAF) L 257.8	118.45	125.15	120.125 (When twr closed)	122.95

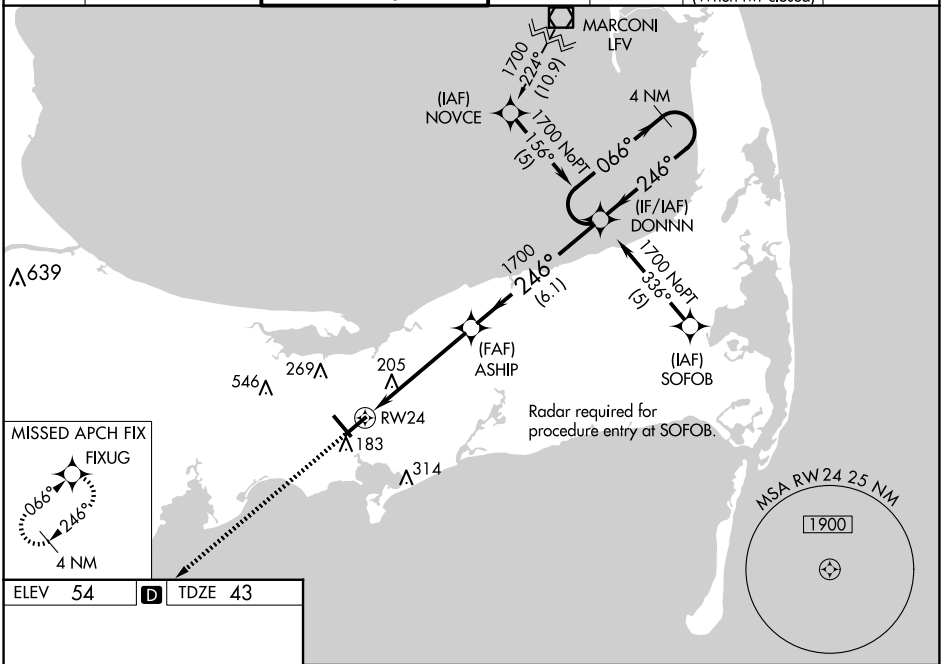

ELEV 54 D TDZE 43



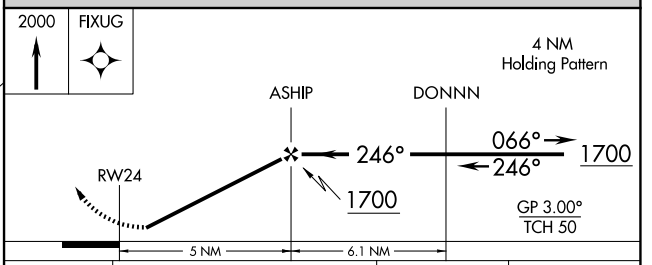

CATEGORY	A	B	C	D
LPV DA	318/50		275 (300-1)	
LNAV/VNAV DA	441/50		398 (400-1)	
LNAV MDA	500/50		457 (500-1)	
C CIRCLING	560-1 506 (600-1)	580-1 526 (600-1)	860-2 ¼ 806 (900-2¼)	860-2½ 806 (900-2½)

REIL Rwy 6
HIRL Rwys 6-24 and 15-33 L

NE-1, 10 JUL 2025 to 07 AUG 2025
NE-1, 10 JUL 2025 to 07 AUG 2025