WAAS	APP CRS		
CH **70401**	**046°**	Rwy Ldg	**7004**
W04A		TDZE	**969**
		Apt Elev	**980**

RNAV (GPS) RWY 4
BLUE GRASS (LEX)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500, and LNAV all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 3000 direct KAYFC and hold.

ATIS	LEXINGTON APP CON	LEXINGTON TOWER	GND CON	CLNC DEL
126.3	**120.15 259.3** (040°-220°) **120.75 298.9** (221°-039°)	**119.1 257.8**	**121.9**	**132.35**

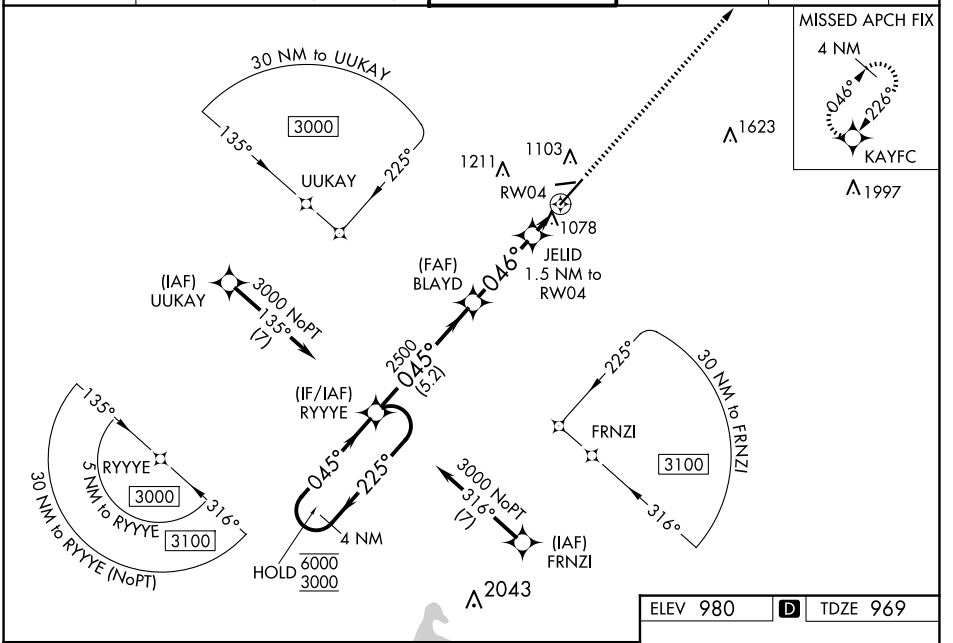

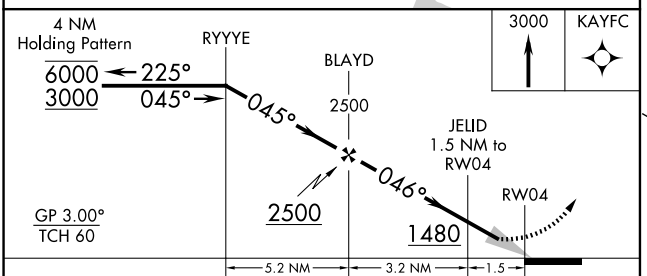

CATEGORY	A	B	C	D
LPV DA	1169/18 200 (200-½)			
LNAV/VNAV DA	1340/35 371 (400-⅝)			
LNAV MDA	1340/24 371 (400-½)		1340/35 371 (400-⅝)	
C CIRCLING	1420-1 440 (500-1)	1440-1 460 (500-1)	1520-1½ 540 (600-1½)	1600-2 620 (700-2)

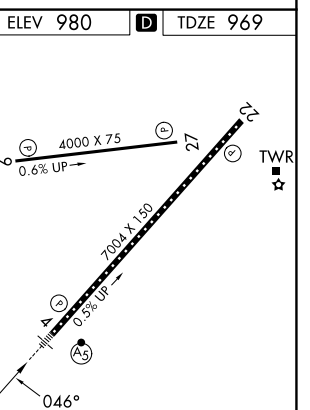

TDZ/CL Rwy 4
REIL Rwys 9, 22 and 27
HIRL Rwy 4-22
MIRL Rwy 9-27

SE-1, 10 JUL 2025 to 07 AUG 2025
SE-1, 10 JUL 2025 to 07 AUG 2025