



WAAS CH <b>78108</b> <b>W24A</b>	APP CRS <b>237°</b>	Rwy Ldg <b>5200</b> TDZE <b>1201</b> Apt Elev <b>1212</b>
--	------------------------	---

RNAV (GPS) RWY 24

LONDON/CORBIN/MAGEE (LOZ)

RNP APCH. ▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use ▲ Somerset altimeter setting: increase LPV DA to 1610 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and LNAV Cats C/D and Circling Cats A/C/D visibility ½ SM.	MISSED APPROACH: Climb to 3900 direct ESONE and hold.
--	---

ASOS <b>119.075</b>	INDIANAPOLIS CENTER <b>124.625 371.925</b>	UNICOM <b>123.0 (CTAF) 0</b>
------------------------	---	---------------------------------

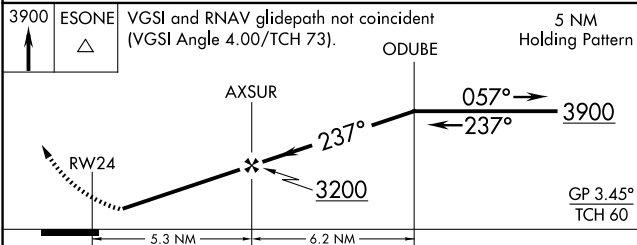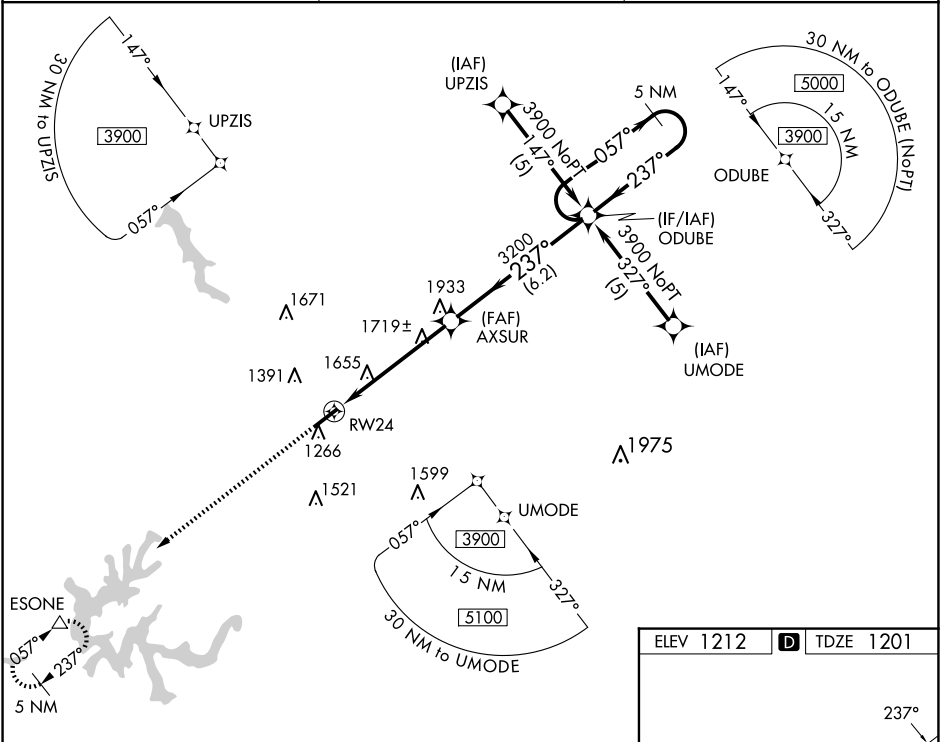

CATEGORY	A	B	C	D
LPV DA	1510-1	309 (300-1)		NA
LNAV MDA	1980-1 779 (800-1)	1980-1¼ 779 (800-1¼)	1980-2¼ 779 (800-2¼)	1980-2½ 779 (800-2½)
CIRCLING	1980-1 768 (800-1)	2040-1¼ 828 (900-1¼)	2040-2¼ 828 (900-2¼)	2040-2¾ 828 (900-2¾)

