

APP CRS	Rwy Idg	3751
001°	TDZE	534
	Apt Elev	537

RNAV (GPS) RWY 36

VANDALIA MUNI (VLA)

RNP APCH - GPS.



▼

▲

Rwy 36 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Salem altimeter setting; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2400 direct LITIC and hold.

AWOS-AV 122.8	KANSAS CITY CENTER 124.3 269.15	UNICOM 122.8 (CTAF) 1
------------------	------------------------------------	--------------------------

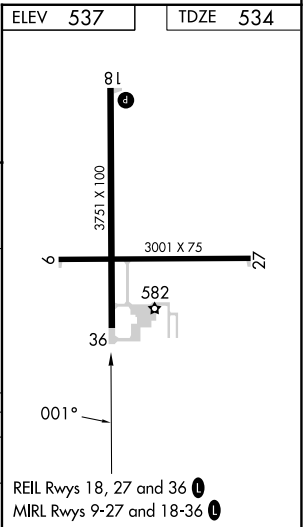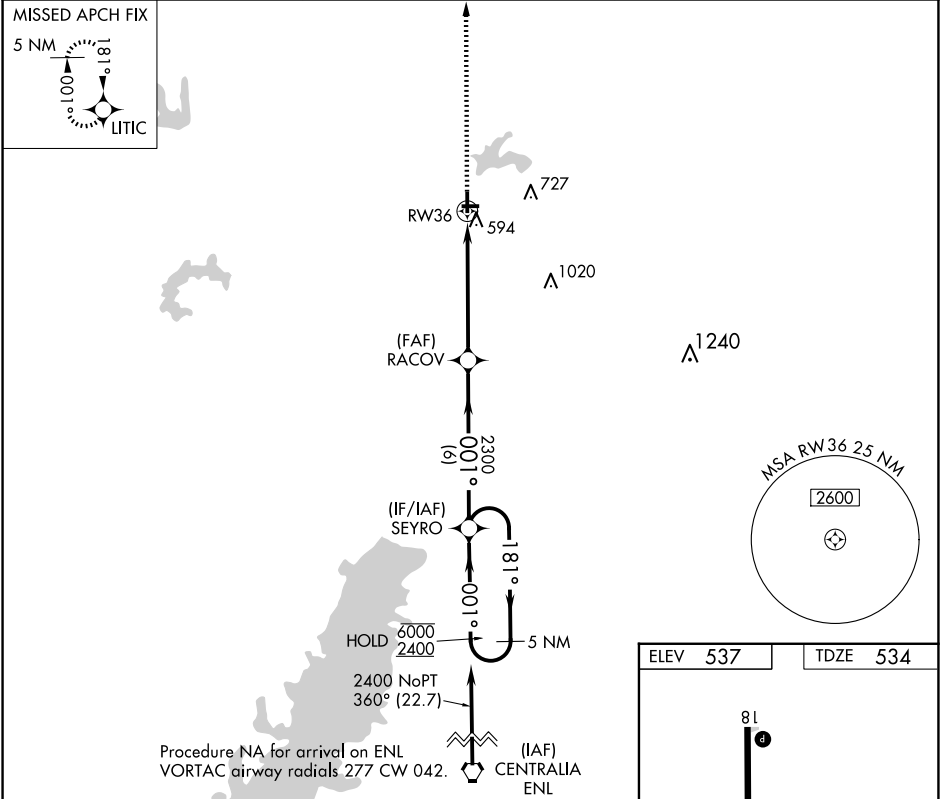

5 NM Holding Pattern					2400	LITIC
SEYRO						
6000 ← 181°						
2400 → 001°						
001°						
RACOV						
2300						
1.4 NM to RW36						
3.05° TCH 40						
RW36						
6 NM						
4 NM						
1.4 NM						
CATEGORY	A	B	C	D		
LNAV MDA	1020-1	486 (500-1)	1020-1 3/8	486 (500-1 3/8)		
CIRCLING	1040-1	503 (600-1)	1060-1 1/2	1220-2 1/4		
			523 (600-1 1/2)	683 (700-2 1/4)		