


LOC/DME I-UDL 110.7 Chan 44	APP CRS 276°	Rwy Idg TDZE Apt Elev 8394 7 65
---	------------------------	---


ILS or LOC RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

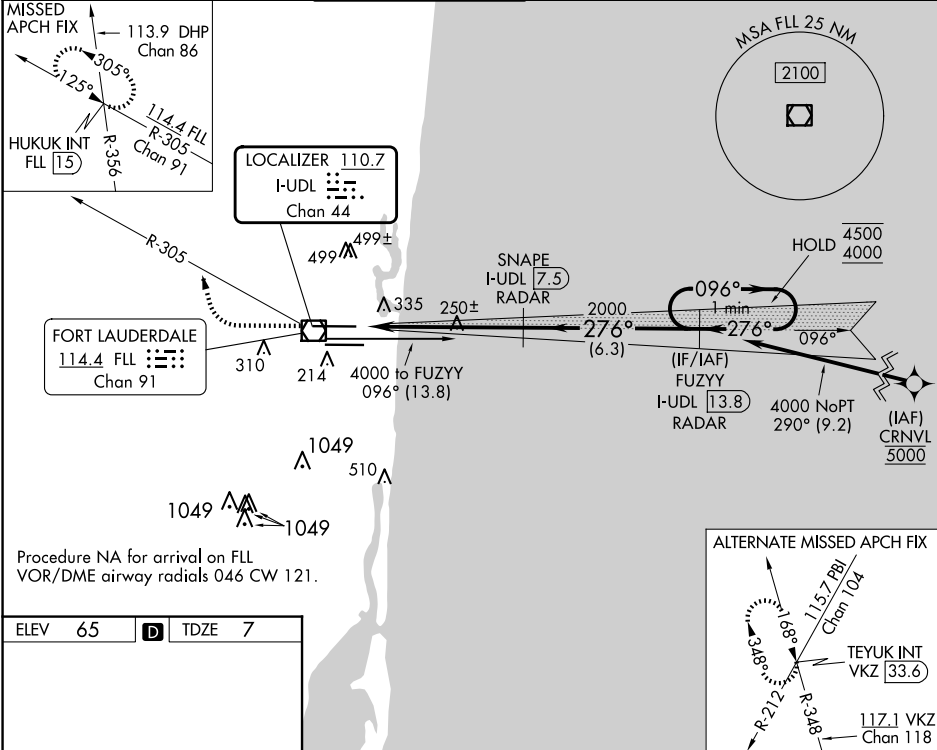

DME or RADAR required. RNP APCH - GPS from CRNVL.	MALSR A5	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on FLL VOR/DME R-305 to HUKUK INT/FLL 15 DME and hold, continue climb-in-hold to 4000.
 Simultaneous approach authorized. Inop table does not apply to S-ILS 28R. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1 3/8 SM.		

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
------------------------	---------------------------------------	---	-------------------------	--------------------------	-------



ELEV 65	D	TDZE 7
---------	---	--------



HIRL Rwy 10L-28R and 10R-28L						GS 3.00° TCH 49	
	CATEGORY		A	B	C	D	
	S-ILS 28R		257/40		250 (200-¾)		
	S-LOC 28R		520/24 513 (500-½)		520/55 513 (500-1)		
	FAF to MAP 6.1 NM						
Knots	60	90	120	150	180		
Min:Sec	6:06	4:04	3:03	2:26	2:02	 CIRCLING	
						680-1 615 (700-1)	800-2 735 (800-2)
							800-2¼ 735 (800-2¼)